



Delta UPS Solutions

All Power Ranges, One Trusted Source


Delta's UPS Systems Demonstrate the Power Behind Competitiveness

An uninterruptible power supply (UPS) is an electrical apparatus designed to furnish emergency power when input sources fail. Different from a standby generator or an auxiliary or emergency power system, in the event of power disruption, a UPS is able to provide near-instantaneous backup power to mission critical systems, making it an indispensable requirement for many industry applications such as high-value production lines and data centers.

With 50+ years as a global leader in the Power Electronics, Automation, and Infrastructure industries, Delta's teams have been working unrelentingly on innovative designs and industry-leading technology. We offer strong

UPS portfolios suitable for a variety of industrial applications as well as the most power-efficient solutions in response to net-zero initiatives. Our award-winning UPSs not only provide reliable power backup but also act as the best advanced power managers to safeguard against potential energy issues, including voltage surges and spikes, voltage sags, total power failure, and frequency differences to ensure a stable power supply to your critical loads. During power failure, our solutions protect customers from potential loss and can keep operations running smoothly while achieving OPEX savings in the long run.

Applications for Delta's UPS Systems



Information Technology

Data Center
Colocation Facility
Network & Data Storage Equipment
Edge Computing



Financial Services

ATM
Customer Service Kiosks & E-trading
Server & Network Infrastructure
Security System




Telecommunication

Base Station
Mobile Switching Center
Telecom IDC
Transmission & Connectivity Device



Government

Smart City & E-government Infrastructure
Surveillance & Security System
Public Safety System
Building Management System



Industrial

Automation Production
Control Equipment & PLC
CCTV & Security System
Data & Networking Equipment



Education

IT & Network Closet
Surveillance & Security System
Critical Administrative Office Equipment
Lab Equipment



Transportation


Traffic Signalling & Crossing
Auto Ticketing & Fare Gate
Security & Monitoring System
IT Closet & Server Room



SME & Retail

POS
PC & NAS
Camera
VoIP
IT Closet

Delta's Highly Reliable UPS Safeguards Your Critical Equipment, Production Line and Data Center

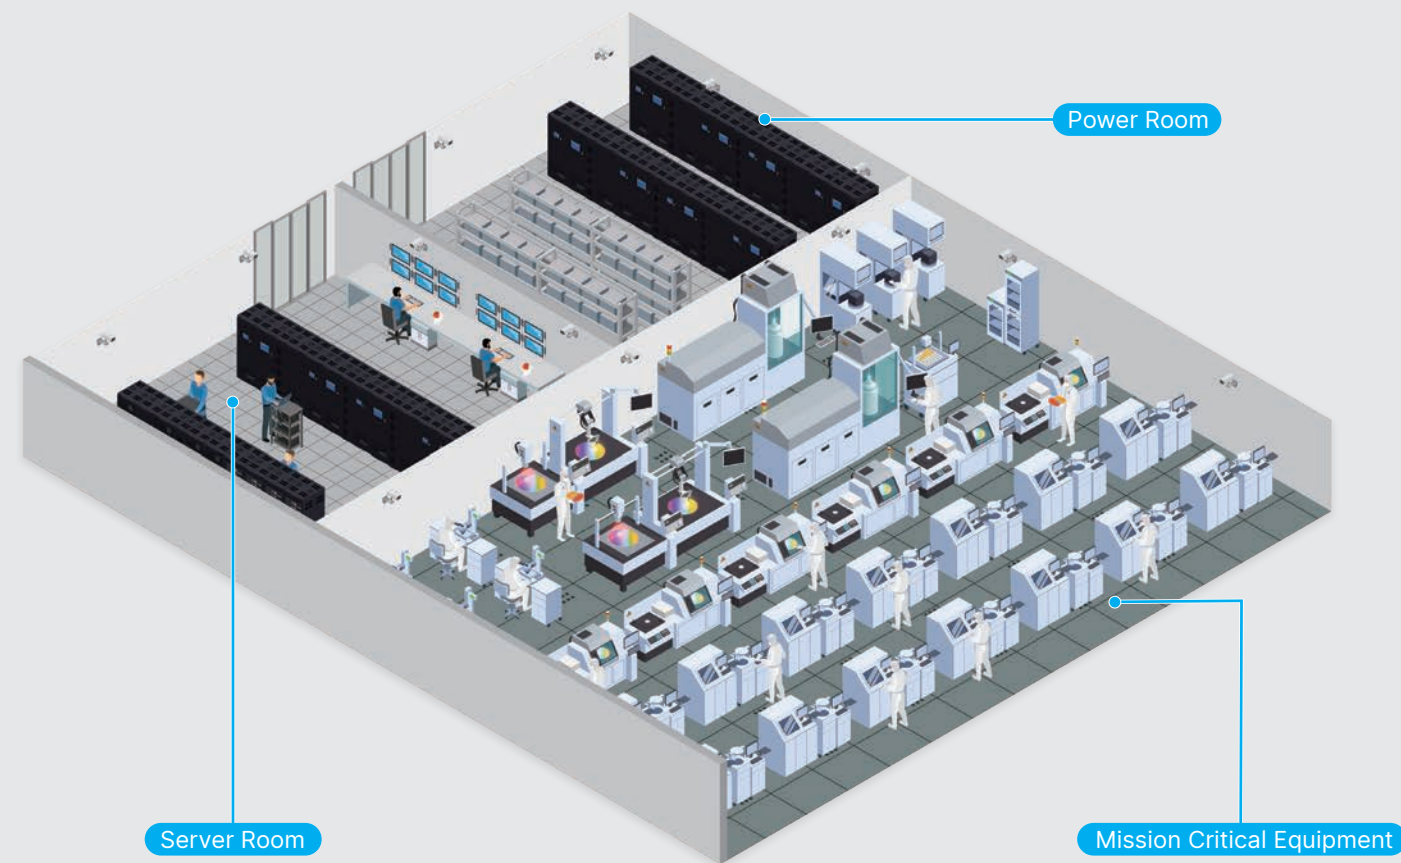

Known for Our Quality

Delta's manufacturing across the globe

Delta is the World's No. 1 provider for Switching Power Supplies, DC Brushless Fans and Telecom Power Systems. Our operations are global in scale with 73 R&D centers and 156 sales offices worldwide. Delta has 51 manufacturing facilities in Taiwan, China, Thailand, India, USA, Brazil, Slovakia and other locations.




Accredited laboratory


Delta's outstanding product design capability comes from our R&D team and its various precision measurement instruments. Our R&D centers utilize diverse advanced equipment and programs including CAD to facilitate circuit simulation, mechanical design, and PCB layout. Delta has well-equipped laboratories to conduct environment-related substance analysis, precision measurement, failure analysis, soldering techniques, electromagnetic compatibility and interference tests, material chemical analysis, quality engineering, safety tests, and more. In addition, we also have laboratories with controlled temperature and humidity to perform numerous reliability tests.



ORT (Ongoing reliability test)



EMC / EMI (electromagnetic compatibility & interference)



Acoustic test



Pulse lightning discharge

Why Delta UPS?



Quality

- **Mass Production Line with Reliable Quality Control:**
We do things right and deliver the best at one go
- **Pass the Tightest Checks & Meet Conformance Requirements from Product Development to Production:**
All manufacturing sites are certified with ISO 9001 and ISO 14001. Laboratories and are accredited by the China National Accreditation Service for Conformity Assessment (CNAS)



Performance

- **Longer Battery Life:**
Wider input voltage range reduces battery use
- **Lower TCO:**
High input/output power factor & efficiency increase utilization of utility power, lower harmonic distortion reduces initial capex
- **Compact/ Modular Design:**
Agile, flexible and saves more space



Service

- **Dedicated Support:**
Professional R&D and FAE teams around the world
- **Highly-Customizable:**
From product-level to solution-level
- **Always Helpful:**
Customer Service Line available



Sustainability

- 2011-2022 DJSI - World Index
2018-2022 Industry Leader
- 2022 Climate Change Leadership Level
- 2022 Water Security Leadership Level
- 2022 Sustainability Award Gold Class

Member of
Dow Jones
Sustainability Indices
Powered by the S&P Global CSA



Sustainability Award
Gold Class 2022
S&P Global

Delta UPS

Uninterrupted Power, Unstoppable Operation

In the digital era, where dependence on technology is paramount, the Uninterrupted Power Supply (UPS) is indispensable. Addressing the constant challenges posed by power outages, fluctuations, harmonic distortion and frequency variation, a UPS ensures seamless electrical continuity. By preventing disruptions, it safeguards operational services, bolstering productivity and business continuity. A UPS not only protects against operation losses but also contributes to prolonged equipment lifespan and data preservation. Investing in a UPS is not just a necessity, it's a strategic move toward sustaining uninterrupted operational services and ensuring optimal productivity for your business.

Why choose a Delta UPS?

- Leading AC-AC efficiency in a compact form
- Fully redundant design with predictive reliability
- Seamless expansion without additional hardware requirements
- High input and output power factor to optimize energy usage
- User-friendly interface for local and remote monitoring/control
- Customizable products tailored to meet distinct requirements

Delta provides a full range of UPSs



Home Office

Network Server

Industry

Enterprise Data Center

Hyperscale Data Center

Line-interactive		On-line																			
1-phase				3-phase																	
 VX 0.6-1.5 kVA		 MX 1.1-3 kVA		 N 1-3 kVA 6-10 kVA		 RT 1-3 kVA 5-10 kVA		 RT 10-20 kVA		 HPH 20-200 kVA		 IPT 20-200 kVA		 DPH 20-200 kVA		 DPH 50-600 kVA		 DPS 300-1200 kVA		 DPM 250-1750 kVA 300-2100 kVA	

Product Matrix

Series		Topology	Configuration	Form	Battery	Page
Agilon Family		Under 1.5 kVA				
	VX Series 0.6-1.5 kVA	Line-interactive	1:1	Tower	Internal	7-8
Amplon Family		1 to 20 kVA				
	MX Series 1.1-3 kVA	Line-interactive	1:1	Rackmountable Tower	Internal	9-10
	N Series 1-3 kVA (Gen3) 6-10 kVA	On-line	1:1	Tower	Internal External	11-14
	RT Series 1-3 kVA (Gen3) 1-3 kVA (Pro)	On-line	1:1	Rackmountable Tower	Internal External	15-18
	RT Series 5-20 kVA	On-line	1:1 (5-10 kVA) 3:1, 3:3 (10-20 kVA)	Rackmountable Tower	External	19-20
Modulon Family		20 to 600 kVA				
	DPH Series 20-200 kVA	On-line	3:3	Modular	Internal (80K-FR) External	23-26
	DPH Series 50-600 kVA	On-line	3:3	Modular	External	27-28
Ultron Family		20 to 2100 kVA				
	HPH Gen2 Series 20-40 kVA	On-line	3:3	Monolithic	Internal (BN/B) External	29-30
	HPH Series 60-200 kVA	On-line	3:3	Monolithic	External	31-34
	IPT Series 20-200 kVA (Transformer-based)	On-line	3:3	Monolithic	External	35-36
	DPS Gen2 Series 300-1200 kVA	On-line	3:3	Monolithic	External	37-38
	DPM Gen2 Series 250-1750 kVA 300-2100 kVA	On-line	3:3	Monolithic	External	39-42

Agilon VX Series UPS

Single-phase, 600-1500 VA

The Agilon VX series line-interactive UPS designed with microprocessor control offers reliable and cost-effective power protection for PCs, monitors, POS, and other sensitive electronics used in home offices and small businesses. The integrated Automatic Voltage Regulation (AVR) ensures all electronics are receiving stable power while providing higher availability. The Agilon VX series' LCD display, auto-shutdown software and other superior features make these units perfect for your data protection.



Reliability

- The integrated AVR (Automatic Voltage Regulation) stabilizes the output voltage for better power quality
- Excellent microprocessor control enables accurate detection of power frequency for higher reliability
- Wide input voltage range allows the UPS to work in harsh electrical environments and reduces battery discharging time
- Batteries automatically recharge even when the UPS is in off mode and the UPS can start without mains (Cold-Start)
- UPS restarts automatically while utility power is recovering
- Surge protection defends your critical load against damage

Convenience

- Several standard IEC 320 output sockets simplify the connectivity to computer and IT peripherals
- Compact size saves more space for critical equipment

Manageability

- Standard USB communication port enhances monitoring and manageability
- Touch screen LCD for a clear display of UPS information (Only applicable for LCD models)
- Advanced UPS management software provides remote shutdown and control



SME



Retail

Technical Specifications

Model	VX-600VA		VX-1000VA	VX-1500VA
Topology	Line interactive			
Power Rating	600 VA	1000 VA		1500 VA
	360 W	600 W		900 W
INPUT				
Nominal Voltage	230 Vac, 1P2W+PE			
Voltage Range	170-280 Vac (100% load)			
Frequency Range	45-65 Hz			
Plug Type ⁽¹⁾	IEC			
OUTPUT				
Nominal Voltage	230 Vac, 1P2W+PE			
Voltage Regulation	±10%			
Frequency	50/60 ± 1 Hz			
Power Factor	0.6			
Connection ⁽²⁾	IEC C13 x4			
Overload Capability	110 ± 10%: < 5 mins			
EFFICIENCY				
Online Mode	Up to 95%			
BATTERY				
Battery Type	VRLA			
Nominal Voltage	12 Vdc	24 Vdc		
Quantity	1 pcs	2 pcs		
Runtime ⁽³⁾	5.7 mins	5 mins	5.5 mins	
Recharge Time	6-8 hours to 90%			
COMMUNICATION INTERFACE				
Display	LED indicator	LCD touch panel		
Port	USB			
Audible Alarm	Battery mode, Low battery, Overload, Fault			
PHYSICAL				
Dimensions (W x D x H)	101 x 279 x 142 mm	130 x 320 x 182 mm		
Net Weight	4.2 kg	8.2 kg	9.7 kg	
Packing Dimensions (W x D x H)	140 x 344 x 220 mm	192 x 390 x 275 mm		
Packing Weight	4.5 kg	8.9 kg	10.4 kg	
ENVIRONMENT				
Operating Temperature	0 to 40°C			
Humidity	0-95% (non-condensing)			
Audible Noise	< 40 dBA		< 45 dBA	
Altitude	0-1000 m			
Storage Temperature	-20 to 50°C			
CONFORMANCE				
Safety	CE, UKCA, EAC, TISI, RCM, BIS, KC			
Sustainability	RoHS, REACH			

(1) Models with Australian, Korean, Indian, and Schuko input plugs are also available

(2) Options include Schuko, AU and IN output connections

(3) Runtime with 50% load

All specifications are subject to change without prior notice.



Amplon MX Series UPS

Single-phase, 1.1-3 kVA

The Amplon MX line-interactive UPS provides pure sine-wave quality compatibility for versatile application to protect devices and prevent small-and-medium businesses from power failure and voltage variations all in a small footprint. The Amplon MX series features enhanced output power factor 0.9, and AVR efficiency up to 96.5%, resulting in a greater power supply for critical loads at significantly less operating cost.



Availability

- Microprocessor-based line interactive design for fast response to power disturbances
- Programmable outlet disconnects non-critical loads when a blackout occurs and reserves more battery power for critical loads
- Automatic voltage regulator (AVR) delivers stable output voltage during brownouts or over-voltages
- Wide input voltage range allows the UPS to work in harsh electrical environments
- Hot-swappable battery design protects equipment during battery replacement

Flexibility

- Supports both rack and tower installation
- Excellent management through a user-friendly graphical and easy-shift LCD display to suit different installation formats
- Supports multiple communication interfaces, including USB port, RS-232, Mini Slot, Surge Protection, and REPO for enhanced monitoring and manageability

Low Total Cost of Ownership

- Output power factor is up to 0.9 to provide more real power to critical loads
- Delivers up to 98.5% efficiency at full load in normal operating mode
- Wide input range and protection against over voltage prolongs battery life



IT



Financial



Government



SME



Retail

Technical Specifications

Model	MX-1.1K	MX-2K	MX-3K
Topology	Line interactive		
Waveform	Sinewave		
Power Rating	1.1 kVA 0.99 kW	2 kVA 1.8 kW	3 kVA 2.7 kW
INPUT			
Nominal Voltage	200/208/220/230(default)/240 Vac, 1P2W+PE		
Voltage Range	170-280 Vac ⁽¹⁾		
Frequency Range	45-65 Hz		
Connection	IEC C14	IEC C20	
OUTPUT			
Nominal Voltage	200/208/220/230/240 Vac, 1P2W+PE		
Voltage Regulation	±1.5%		
Frequency	50/60 ± 1 Hz		
Total Harmonic Distortion (THDv)	< 2% (linear load); < 5% (non-linear load)		
Power Factor	0.9		
Connection	Programmable outlet IEC C13 x4, Non-programmable outlet IEC C13 x4		Programmable outlet IEC C13 x4, Non-programmable outlet IEC C13 x4. IEC C19 x1
Overload Capability	< 103%: continues; 103-120%: 5 mins; 120-150%: 10 secs		
Current Crest Ratio	3:1		
EFFICIENCY			
Normal Mode	98%	98.3%	98.5%
AVR Mode	95.5%	96.5%	
BATTERY			
Battery Type	VRLA		
Nominal Voltage	24 Vdc	48 Vdc	72 Vdc
Quantity	2 pcs	4 pcs	6 pcs
Runtime	100% Load 75% Load	2.7 mins 5 mins	3.4 mins 6.1 mins
Recharge Time	4 hours to 90%		
COMMUNICATION INTERFACE			
Display	LCD display with LED indicators		
Port	USB, RS-232, Mini slot, REPO, Surge protection		
Audible Alarm	Battery mode, Low battery, Battery missing/replacement, Overload, Fault, EPO enable, Over temperature		
Emergency Power Off	Yes		
PHYSICAL			
Dimensions (W x D x H)	438 x 410 x 88 mm	438 x 510 x 88 mm	438 x 630 x 88 mm
Net Weight	14.1 kg	21.3 kg	32.1 kg
Packing Dimensions (W x D x H)	500 x 560 x 180 mm	565 x 700 x 200 mm	600 x 760 x 200 mm
Packing Weight	16.1 kg	29.7 kg	35.3 kg
ENVIRONMENT			
Operating Temperature	0 to 40°C (without derating)		
Humidity	20-90% (non-condensing)		
Audible Noise ⁽²⁾	< 45 dBA		
Altitude	0-3000 m (derating 1%/100m from 1501-3000 m)		
Storage Temperature	-20 to 50°C		
CONFORMANCE			
Safety	CE, UKCA, TISI, RCM		
Sustainability	RoHS, REACH		

(1) 200 V: 150-234 Vac, 208 V: 156-243 Vac, 220 V: 162-268 Vac, 240 V: 177-290 Vac

All specifications are subject to change without prior notice.

Amplon N Gen3 Series UPS

Single-phase, 1-3 kVA

The Amplon N Gen3 Series 1-3 kVA is an online double-conversion uninterruptible power system (UPS) in a best-in-class compact size tower design. It supplies clean sine-wave input power for IT and other sensitive equipment and prevents work interruption, data loss or equipment damage from voltage sags, spikes, harmonic distortion and other power failures.



High Availability


- Output power factor 0.9 provides more wattage to critical loads
- True online double-conversion topology and zero transfer time to battery mode
- Generator compatibility ensures clean, uninterrupted power to the loads during an extended power outage

Green with Low TCO

- Capable of working in harsh electrical environments with wide I/P voltage range to minimize battery usage
- Excellent overload capacity allows the overload condition to continue within the timeframe
- AC-AC efficiency up to 90%, and ECO mode efficiency up to 95% for better energy savings

Easy Management

- The intuitive LCD display provides UPS status information with the ability to configure locally
- Supports multiple communication interfaces, including USB port, RS-232 port and Mini slot (option for mini SNMP, mini Modbus and mini relay I/O card) for remote monitoring and configuration
- Battery self-test function ensures early detection of the battery status when batteries need to be replaced

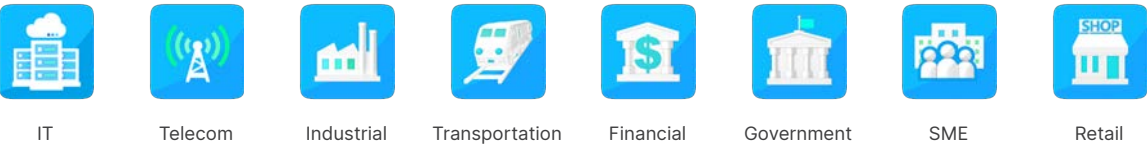

Technical Specifications

Model		NX-1K	NX-2K	NX-3K
Topology		Online double-conversion		
Power Rating		1 kVA 0.9 kW	2 kVA 1.8 kW	3 kVA 2.7 kW
INPUT				
Nominal Voltage		220/230 Vac, 1P2W+PE		
Voltage Range		180-285 Vac (100% load); 120-180 Vac (with derating to 60-100% load)		
Frequency Range		40-70 Hz		
Power Factor		> 0.99 (100% load)		
Connection		IEC C14		IEC C20
OUTPUT				
Nominal Voltage		200 ⁽¹⁾ /208 ⁽¹⁾ /220/230/240 Vac, 1P2W+PE		
Voltage Regulation		±1%		
Frequency		50/60 ± 3 Hz		
Total Harmonic Distortion (THDv)		≤ 3% (linear load)		
Power Factor		0.9		
Connection		IEC C13 x4		IEC C13 x4 + Terminal
Overload Capability	Standard ⁽²⁾	≤ 105%: continuous; 106-110%: 10 mins.; 111-130%: 30 secs; 131-150%: 3 secs; > 150%: immediately		
	Extended ⁽²⁾	≤ 105%: continuous; 106-110%: 10 mins.; 111-130%: 1 min; 131-150%: 3 secs; > 150%: 0.5 sec		
Current Crest Ratio		3:1		
EFFICIENCY				
Online Mode		Up to 90%		
ECO Mode		Up to 95%		
BATTERY				
Battery Type		VRLA		
Nominal Voltage	Standard	24 Vdc	48 Vdc	72 Vdc
	Extended	36 Vdc	N/A	N/A
Quantity	Standard	2 pcs	4 pcs	6 pcs
	Extended	3 pcs	N/A	N/A
Std. Model Runtime	100% Load	3.1 mins	3.3 mins	3.6 mins
	70% Load	6.1 mins	6.5 mins	6.9 mins
Charge Current		1 A		
COMMUNICATION INTERFACE				
Display		LCD display with LED indicators		
Port		USB, RS-232, Mini slot		
Audible Alarm		Battery mode, Low battery, Overload, Fault, Bypass mode		
PHYSICAL				
Dimensions (W x D x H)		145 x 282 x 220 mm	145 x 492 x 220 mm	190 x 421 x 318 mm
Net Weight	Standard	9.2 kg	16.8 kg	27 kg
	Extended	4.4 kg	N/A	N/A
Packing Dimensions (W x D x H)		230 x 360 x 325 mm	230 x 590 x 355 mm	320 x 560 x 460 mm
Packing Weight	Standard	10.3 kg	18.6 kg	28.4 kg
	Extended	5.5 kg	N/A	N/A
ENVIRONMENT				
Operating Temperature		0 to 50°C (40 to 50°C de-rating to 70% load)		
Humidity		20-90% (non-condensing)		
Audible Noise ⁽³⁾		< 45 dBA		
Altitude		0-3000 m (derating 1%/100m from 1501-3000 m)		
Storage Temperature		-20 to 50°C		
CONFORMANCE				
Safety		CE, UKCA, TISI, RCM ⁽⁴⁾ , KC ⁽⁴⁾		
EMC		IEC 62040-2		
Sustainability		RoHS, REACH		

(1) 200V is for the extended runtime model, derating 200V and 208V to 80% load. The standard model derates 208V to 70% load.
(2) Standard model: built-in batteries; Extended model: capability to add external battery packs
(3) Audible noise test with UPS < 75% load at 25 °C in online mode
(4) Applicable only to the standard runtime models

Amplon N Series UPS

Single-phase, 6/10 kVA

The Amplon N series 6-10 kVA UPS is a single-phase on-line UPS with pioneering technology that provides output power factor up to unity and AC-AC efficiency to a maximum 95%. Its remarkably compact dimensions reserve more room for critical equipment such as workstations, POSs, ATMs, office appliances, small server rooms, and production equipment. The Amplon N series superior features include a N+X parallel redundancy function and variable fan speed control to guarantee high system availability and best Total Cost of Ownership (TCO).



The Most Compact Design and Best TCO


- The smallest dimensions in its class saves significant space for more critical equipment
- A pioneer in unity power factor (kVA=kW) to maximize power availability
- The highest AC-AC efficiency up to 95% and efficiency of 98% in ECO mode for exceptional energy cost savings
- Automatic speed regulation function with multi-stage fan speed control to maximize system efficiency, significantly reduce audible noise, and prolong the service life of the fans


High Availability


- True online double-conversion topology and zero transfer time to battery to ensure high reliability
- Parallel configuration for expansion and N+X redundancy up to 4 units
- Advanced DSP (Digital Signal Processor) controller for fast computation capabilities and a simplified control circuit for enhanced stability
- Generator compatibility to ensure continuous and reliable power


Intelligent Management


- Excellent local communications through user-friendly LCD display and LED indicators
- Intelligent battery management to maximize battery performance and extend battery life
- Various types of communication interfaces for monitoring and manageability



IT



Telecom



Industrial


Transportation


Financial


Government


SME


Retail

Technical Specifications

Model	N-6K	N-10K
Topology	Online double-conversion	
Power Rating	6 kVA	10 kVA
	6 kW	10 kW
Parallel Configuration	Up to 4 units	
INPUT		
Nominal Voltage	200/208/220/230/240 Vac, 1P2W+PE	
Voltage Range ⁽¹⁾	195-280 Vac (100% load); 100-195 Vac (with derating to 50-100% load)	
Frequency Range	40-70 Hz	
Total Harmonic Distortion (THDi)	< 3%	
Power Factor	≥ 0.99 (100% load)	
Connection	Terminal	
OUTPUT		
Nominal Voltage	200/208/220/230/240 Vac, 1P2W+PE	
Voltage Regulation	±1%	
Frequency	50/60 ± 0.5 Hz	
Total Harmonic Distortion (THDv)	< 2% (linear load); < 5% (non-linear load)	
Power Factor	1	
Connection	Terminal	
Overload Capability	< 105%: continues; 105-125%: 2 mins; 126-150%: 30 secs	
Current Crest Ratio	3:1	
EFFICIENCY		
Online Mode	Up to 95%	
Eco Mode	Up to 98%	
BATTERY		
Battery Type	VRLA	
Nominal Voltage	240 Vdc ⁽²⁾	
Quantity	16-22 pcs	
Charge Current	1.5-8 A (selectable)	
COMMUNICATION INTERFACE		
Display	LCD display with LED Indicators	
Port	USB, RS-232, Smart slot, REPO	
Audible Alarm	Battery mode, Low battery, Battery missing/replacement, Overload, Fault	
Emergency Power Off	Yes	
PHYSICAL		
Dimensions (W x D x H)	190 x 390 x 325 mm	
Net Weight	10.1 kg	12.7 kg
Packing Dimensions (W x D x H)	300 x 500 x 443 mm	
Packing Weight	13 kg	15.2 kg
ENVIRONMENT		
Operating Temperature	0 to 55°C (45 to 55°C de-rating to 80% load)	
Humidity	5-95% (non-condensing)	
Audible Noise	< 50 dBA	
Altitude	0-1000 m	
Storage Temperature	-15 to 55°C	
CONFORMANCE		
Safety	CE, UKCA, TISI, RCM, BIS, KC	
EMC	IEC 62040-2	
Sustainability	RoHS, REACH	

(1) 200/ 208 V: 176-280 Vac (90% load), 100-174 Vac (with derating to 40-90% load)

(2) KR model battery default voltage is 192 Vdc

All specifications are subject to change without prior notice.

Amplon RT Gen3 Series UPS

Single-phase, 1-3 kVA

Delta’s Amplon RT series UPS is a robust online double-conversion UPS offering strong power protection with a convertible rack and tower configuration in a 2U size. With its clean output power in pure sine wave, RT Gen3 can handle a wide range of utility problems, from blackout to harmonic distortion. Rest assured that your device is always fortified and safeguarded with RT Gen3!



High Availability


- True online double-conversion topology and zero transfer time to battery mode
- Operates at up to 50°C adapting to various environments
- Excellent overload capacity allows the overload condition to continue within the timeframe

Green with Low TCO


- Output power factor 0.9 provides more capacity to load
- Up to 90% online mode efficiency and 95% ECO mode efficiency contributes to significant energy cost savings
- Capable of working in harsh electrical environments with a wide input voltage range to minimize battery usage

Easy Management


- Convertible rack and tower configuration with rotatable LCD screen
- LCD display and intuitive interface offer effortless monitoring and configuration
- Excellent local communications through rotatable LCD display
- Intelligent management software connectivity via RS-232, mini slot or USB port for remote monitoring and setting




IT




Telecom




Industrial




Transportation




Financial



Government



SME



Retail

Technical Specifications

Model			RT-1K	RT-2K	RT-3K
Topology			Online double-conversion		
Power Rating			1 kVA 0.9 kW	2 kVA 1.8 kW	3 kVA 2.7 kW
INPUT					
Nominal Voltage			208 ⁽¹⁾ /220/230/240 Vac, 1P2W+PE		
Voltage Range			180-280 Vac (100% load); 120-180 and 280-300 Vac (with derating to 50-100% load)		
Frequency Range			40-70 Hz		
Power Factor			≥ 0.99 (100% load)		
Connection			IEC C14		IEC C20
OUTPUT					
Nominal Voltage			208 ⁽¹⁾ /220/230/240 Vac, 1P2W+PE		
Voltage Regulation			±1%		
Frequency			50/60 ± 3 Hz		
Total Harmonic Distortion (THDv)			< 3% (linear load)		
Power Factor			0.9		
Connection			IEC C13 x4		IEC C13 x4 + IEC C19 x1
Overload Capability			105-109%: 10 mins; 110-129%: 30 secs; 130-149%: 3 secs; ≥ 150%: 0.5 secs		
Current Crest Ratio			3:1		
EFFICIENCY					
Online Mode			88%		90%
ECO Mode			93%		95%
BATTERY					
Battery Type			VRLA		
Nominal Voltage	Standard ⁽²⁾		24 Vdc	48 Vdc	72 Vdc
	Extended ⁽²⁾		36 Vdc	72 Vdc	
Runtime	Standard	100% Load	3.1 mins	3.3 mins	3.5 mins
		70% Load	6.1 mins	6.5 mins	6.9 mins
Parallel Configuration	Extended		Up to 4 EBCs		
Charge Current	Standard		1 A		
	Extended		1/2/4/6 A (configurable)		
COMMUNICATION INTERFACE					
Display			LCD display with LED indicators		
Port			USB, RS-232, Mini slot (option for mini SNMP, mini Modbus and mini relay I/O card)		
PHYSICAL					
Dimensions (W x D x H)	Standard		438 x 310 x 86 mm	438 x 410 x 86 mm	438 x 630 x 86 mm
	Extended		438 x 310 x 86 mm	438 x 410 x 86 mm	438 x 460 x 86 mm
Net Weight	Standard		10.6 kg	17.9 kg	26.6 kg
	Extended		5.7 kg	8.4 kg	8.9 kg
Packing Dimensions (W x D x H)	Standard		600 x 500 x 240 mm	565 x 700 x 240 mm	600 x 760 x 240 mm
	Extended		600 x 500 x 240 mm	565 x 700 x 240 mm	545 x 760 x 240 mm
Packing Weight	Standard		13.9 kg	22 kg	31.5 kg
	Extended		9.4 kg	12.8 kg	13.3 kg
ENVIRONMENT					
Operating Temperature			0 to 50°C (40 to 50°C de-rating to 70% load)		
Humidity			10-90% (non-condensing)		
Audible Noise ⁽²⁾			≤ 50 dBA		
Altitude			0-3000 m (derating 1%/100m from 1501-3000 m)		
CONFORMANCE					
Safety			CE, UKCA, KC		
EMC			IEC 62040-2		
Sustainability			RoHS, REACH		

(1) De-rating to 70% load
(2) Standard model: built-in batteries; Extended model: capability to add external battery packs
All specifications are subject to change without prior notice.



Amplon RT Pro Series UPS

Single-phase, 1-3 kVA

Introducing Delta RT Pro UPS, a top-tier high-performance online double-conversion solution featuring industry-leading AC-AC efficiency, unity power factor, and superior flexibility, all in a compact 2U size. Engineered to safeguard your critical applications from diverse power challenges, RT Pro ensures a resilient power foundation, paving the way for continuous business success and growth!



Power More from Less


- Unity power factor (kVA=kW), provides maximum power for your facility
- Industry leading AC-AC efficiency up to 94.3% and ECO mode efficiency up to 99% offer significant energy cost savings
- Extends battery lifespan through reduced usage with wide 120-280V input range and a smart 3-stage battery charge mechanism


Superior Flexibility


- Two programmable outlets group for power-cycling and optimize battery runtime for most critical applications
- Easily scales for longer backup time with optional external battery pack
- REPO/ROO enables remote shutdown and restart during accidents to ensure safety
- Integrated dry-contacts with user-selectable definition
- Convertible rack and tower configuration with rotatable LCD screen


Easy Management


- CE and UL certified, streamlines global models and service management for multinational operations
- LCD display and intuitive interface offer effortless monitoring and configuration
- Intelligent management software connectivity via RS-232, USB, or mini slot port for remote monitoring and setting



IT



Telecom



Industrial


Transportation


Financial


Government


SME


Retail

Technical Specifications

Model	RT Pro-1K		RT Pro-2K	RT Pro-3K
Topology	Online double-conversion			
Power Rating	1 kVA	2 kVA	3 kVA	
	1 kW	2 kW	3 kW	
INPUT				
Nominal Voltage	200/208/220/230/240 Vac, 1P2W+PE			
Voltage Range	175-280 Vac (100% load); 120-175 Vac (with derating to 70-100% load) ⁽¹⁾			
Frequency Range	40-70 Hz			
Power Factor	0.99 (100% load)			
Connection	IEC C14	IEC C20		
OUTPUT				
Nominal Voltage	200 ⁽²⁾ /208 ⁽²⁾ /220/230/240 Vac, 1P2W+PE			
Voltage Regulation	±3% (linear load)			
Frequency	50/60 ± 0.05 Hz			
Total Harmonic Distortion (THDv)	≤ 2% (linear load)			
Power Factor	1			
Connection	IEC C13 ×2, Programmable IEC C13 ×2 ×2 groups	IEC C13 x2, IEC C19 x1, Programmable IEC C13 x2 x2 groups		
Overload Capability	< 105% continuous; 105-125%: 1 min ± 5 secs; 126-150%: 15 ± 3 secs; 151-155%: 0.1 secs			
Current Crest Ratio	3:1			
EFFICIENCY				
Online Mode	93.5%	94%	94.3%	
ECO Mode	99%			
BATTERY				
Battery Type	VRLA			
Nominal Voltage	24 Vdc	48 Vdc	72 Vdc	
Quantity	2 pcs	4 pcs	6 pcs	
Runtime	100% Load	2.4 mins	2.5 mins	
	70% Load	4.6 mins	4.9 mins	
Charge Current	Up to 2.5 A			
COMMUNICATION INTERFACE				
Display	LCD display with LED indicators			
Port	USB, RS-232, REPO, Mini Slot, Input dry contact x1, Output dry contact x3			
REPO (Emergency Power Off)	Standard			
PHYSICAL				
Dimensions (W x D x H)	440 x 335 x 88 mm	440 x 430 x 88 mm	440 x 565 x 88 mm	
Net Weight	11.7 kg	21 kg	28 kg	
Packing Dimensions (W x D x H)	484 x 579 x 220 mm	594 x 508 x 220 mm	605 x 1005 x 220 mm	
Packing Weight	18 kg	28.8 kg	38 kg	
ENVIRONMENT				
Operating Temperature	0 to 55°C ⁽³⁾			
Humidity	5-95% (non-condensing)			
Audible Noise ⁽⁴⁾	< 40 dBA			
Altitude	0-3000 m (derating 1%/100m from 1000-3000 m)			
CONFORMANCE				
Safety	CE, UL, cUL, RCM, UKCA			
EMC	IEC 62040-2			
Sustainability	RoHS, REACH			

(1) 200/ 208 Vac: 160-280 Vac (100% load); 120-160 Vac (with derating to 70-100% load)

(2) Derating to 90% load

(3) 40 to 50°C de-rating to 90% load; 50 to 55°C de-rating to 75% load

(4) ECO mode at front side 1 meter

All specifications are subject to change without prior notice.



Amplon RT Series UPS

Single-phase, 5-10 kVA

Introducing the Amplon RT Series 5-10 kVA UPS: Compact yet powerful, it provides a unity output power factor and top efficiency, with up to 95.5% AC-AC efficiency. It also features Li-ion battery compatibility for enhanced density and sustainability. With optional complete power solutions like the Maintenance Bypass Breaker and Rack Remote Power Panel integration, it ensures seamless operation for critical applications.



Efficiency and Reliability


- Best-in-class AC-AC efficiency of up to 95.5% and 99% in ECO mode for lower energy costs
- Wide input voltage range for operation in harsh environments and extended battery life
- AC-start function enables the UPS to switch on without battery connection
- Hot-swappable batteries for continuous operation during replacements

Availability and Flexibility


- Unity output power factor ensures no de-rating with loads
- Up to 4 units parallel capacity for redundancy and load expansion
- Programmable load bank disconnects non-critical loads during blackouts, saving battery power for critical loads
- VRLA and Li-ion External Battery Cabinet (EBC) for scalable runtime
- Extended Runtime models support flexible battery quantity, reducing maintenance costs
- The Power Distribution Box (PDB) and Maintenance Bypass Breaker (MBB) come standard with Standard Runtime models, simplifying configuration

Manageability


- User-friendly LCD display for excellent local management
- Intelligent battery management for extended life and maximum performance
- Free UPS management software and multiple communication interfaces ensure seamless remote monitoring and device protection




IT




Telecom




Industrial




Transportation




Financial



Government



SME



Retail

Technical Specifications

Model		RT-5K	RT-6K	RT-8K	RT-10K
Topology		Online double-conversion			
Power Rating		5 kVA	6 kVA	8 kVA	10 kVA
		5 kW	6 kW	8 kW	10 kW
Parallel Configuration		Up to 4 units			
INPUT					
Nominal Voltage		200/208/220/230/240 Vac, 1P2W+PE			
Voltage Range		175-280 Vac (100% load); 100-175 Vac (with derating to 50-100% load)			
Frequency Range		40-70 Hz			
Total Harmonic Distortion (THDi)		< 3%			
Power Factor		> 99% (100% load)			
Connection		Input terminal			
OUTPUT					
Nominal Voltage		200/208/220/230/240 Vac, 1P2W+PE			
Voltage Regulation		±1%			
Frequency		50/60 ± 0.05 Hz			
Total Harmonic Distortion (THDv)		< 2% (linear load); < 4% (non-linear load)			
Power Factor		1			
Connection	Standard ⁽¹⁾	C13 x6, C19 x2, Terminal x1 Programmable C19 outlet x1		C13 x6, C19 x4, Terminal x1 Programmable C19 outlet x1	
	Extended ⁽¹⁾	Terminal x1, Programmable terminal x1			
Overload Capability ⁽²⁾		106-125%: 5 mins; 126-150%: 1 min; > 150%: 500 ms			
Current Crest Ratio		3:1			
EFFICIENCY					
Online Mode		Up to 95.5%			
Eco Mode		Up to 99%			
BATTERY					
Battery Type		VRLA/ Lithium-ion			
Nominal Voltage	Standard	192 Vdc		240 Vdc	
	Extended	144 ⁽³⁾ , 192-264 Vdc			
Charge Current	Standard	1 A (default), up to 8 A		1.5 A (default), up to 8 A	
	Extended	Up to 8 A			
COMMUNICATION INTERFACE					
Display		Graphical LCD display with LED indicators			
Port		USB, RS-232, RS-485, Mini Slot, REPO, Input dry contact x1, Output dry contact x3			
PHYSICAL					
Dimensions (W x D x H)	Standard	440 x 665 x 176 mm		440 x 750 x 218 mm	
	Extended	440 x 430 x 88.2 mm		440 x 565 x 88.2 mm	
Net Weight	Standard	54 kg		85.5 kg	
	Extended	10.9 kg		15.2 kg	
ENVIRONMENT					
Operating Temperature		0 to 55°C (45 to 55°C de-rating to 75% load)			
Humidity		5-95% (non-condensing)			
Audible Noise		< 48 dBA		< 50 dBA	
Altitude		0-3000 m (derating 1%/100m from 1000-3000 m)			
CONFORMANCE					
Safety		CE, UKCA, TISI, RCM			
EMC		IEC 62040-2			
Performance		IEC 62040-3			
Sustainability		RoHS, REACH			

(1) Standard model: built-in batteries; Extended model: capability to add external battery packs
(2) Operating temperature < 32°C
(3) Derating to 70% load

All specifications are subject to change without prior notice.



Amplon RT Series UPS

Three-phase, 10-20 kVA

Introducing the Amplon RT Series 10-20 kVA UPS: Compact yet powerful, it provides a unity output power factor and top efficiency, with up to 96.5% AC-AC efficiency. It also features Li-ion battery compatibility for enhanced density and sustainability. With optional complete power solutions like the Maintenance Bypass Breaker and Rack Remote Power Panel integration, it ensures seamless operation for critical applications.



Efficiency and Reliability


- Best-in-class AC-AC efficiency of up to 96.5% and 99% in ECO mode for lower energy costs
- Wide input voltage range for operation in harsh environments and extended battery life
- AC-start function enables the UPS to switch on without battery connection
- Hot-swappable batteries for continuous operation during replacements


Availability and Flexibility


- Unity output power factor ensures no de-rating with loads
- Up to 4 units parallel capacity for redundancy and load expansion
- VRLA and Li-ion External Battery Cabinet (EBC) for scalable runtime
- Supports flexible battery quantity, reducing maintenance costs


Manageability


- User-friendly LCD display for excellent local management
- Intelligent battery management for extended life and maximum performance
- Free UPS management software and multiple communication interfaces ensure seamless remote monitoring and device protection



IT



Telecom



Industrial


Transportation


Financial


Government


SME


Retail

Technical Specifications

Model	RT-10K-3P		RT-15K-3P	RT-20K-3P
Topology	Online double-conversion			
Power Rating	10 kVA	15 kVA		20 kVA
	10 kW	15 kW		20 kW
Parallel Configuration	Up to 4 units			
INPUT				
Nominal Voltage	380/400/415 Vac. 3P4W+PE			
Voltage Range	305-485 Vac (100% load); 138-305 Vac (with derating to 40-100% load)			
Frequency Range	40-70 Hz			
Total Harmonic Distortion (THDi)	< 3%			
Power Factor	> 99% (100% load)			
Connection	Input terminal x1, Bypass input terminal x1			
OUTPUT				
Nominal Voltage	380/400/415 Vac. 3P4W+PE or 220/230/240 Vac, 1P2W+PE			
Voltage Regulation	±1%			
Frequency	50/60 ± 0.05 Hz			
Total Harmonic Distortion (THDv)	< 2% (linear load); < 4% (non-linear load)			
Power Factor	1			
Connection	Terminal x1			
Overload Capability ⁽²⁾	106-125%: 5 mins; 126-150%: 1 min; > 150%: 500 ms			
Current Crest Ratio	3:1			
EFFICIENCY				
Online Mode	Up to 96%	Up to 96.5%		
Eco Mode	Up to 99%			
BATTERY				
Battery Type	VRLA/Lithium-ion			
Nominal Voltage	144 ⁽²⁾ , 192-264 Vdc	±144 ⁽²⁾ , ±192-±264 Vdc		
Charge Current	Up to 8 A			
COMMUNICATION INTERFACE				
Display	Graphical LCD display with LED indicators			
Port	USB, RS-485, Mini Slot, REPO, Input dry contact x1, Output dry contact x3			
PHYSICAL				
Dimensions (W x D x H)	440 x 649 x 88.2 mm	440 x 760 x 88.2 mm		
Net Weight	16.6 kg	22 kg		22.5 kg
ENVIRONMENT				
Operating Temperature	0 to 55°C (45 to 55°C de-rating to 75% load)			
Humidity	5-95% (non-condensing)			
Audible Noise	< 50 dBA	< 54 dBA		
Altitude	0-3000 m (derating 1%/100m from 1000-3000 m)			
CONFORMANCE				
Safety	CE, UKCA, UL/cUL, TISI, RCM, BIS, BSMI			
EMC	IEC 62040-2			
Performance	IEC 62040-3			
Sustainability	RoHS, REACH, Energy Star 2.0			

(1) Operating temperature < 32°C

(2) Derating to 70% load

All specifications are subject to change without prior notice.

Modulon DPH Series UPS

Three-phase, 20-80/120 kVA

In this IT intensive world with heavy data traffic driven by the cloud, 4G/5G and media streaming applications, IT managers are facing the challenges of increasing rack power density and limited data center space. Delta's innovative modular UPS technologies provide the answer to customers' demands for ultimate availability, excellent performance, and high efficiency. The brand-new Delta Modulon DPH series UPS 80/120 kVA provides exceptional power density of 20 kW per module in a 2U height, offering the smallest footprint and best space utilization. The Modulon DPH Series UPS is the ideal modular power protection for all critical IT applications with its small package, flexibility and seamless integration.



Excellent Power Performance


- High AC-AC efficiency over 96% and ECO mode to 99% resulting in marked energy cost savings
- Green mode featuring a load aggregation function optimizes system efficiency
- Up to 120 kW within all equipped breakers in 162.8 kW/m³ which supports top/bottom cable entry without an additional cabinet to achieve the best utilization compared with its peers

Ultimate Availability


- Fully modularized design and hot-swappable key modules ensure Mean Time To Repair (MTTR) is close to zero without downtime risk
- Redundant components and dual CAN bus delivers highest system availability and avoids single point of failure
- Key components aging pre-warning mechanism provides proactive reliability to minimize human error and reduce downtime risk (optional)

High Manageability


- User-friendly 10" color touchscreen enables easy local UPS management
- Environment information such as temperature, humidity and transmitting signals from environment sensors can be integrated into the UPS for easy monitoring via the LCD of the UPS
- If the UPS is equipped with an external battery management system, the battery information can be integrated into the UPS and monitored via the LCD of the UPS




IT




Telecom




Industrial



Transportation



Financial



Government

Technical Specifications

Model	DPH-80K	DPH-120K
Power Rating	20/40/60/80 kVA 20/40/60/80 kW	20/40/60/80/100/120 kVA 20/40/60/80/100/120 kW
Frame Size	80 kW	120 kW
Parallel Configuration	Up to 8 units	
INPUT		
Nominal Voltage	380/400/415 Vac, 3P4W+PE	
Voltage Range	305-477 Vac (100% load); 228-305 Vac (with derating to 70-100% load)	
Frequency Range	40-70 Hz	
Total Harmonic Distortion (THDi)	< 2% ⁽¹⁾	
Power Factor	> 0.99 (100% load)	
OUTPUT		
Nominal Voltage	380/400/415 Vac, 3P4W+PE	
Voltage Regulation	±1%	
Frequency	50/60 ± 0.05 Hz	
Total Harmonic Distortion (THDv)	≤ 1% (linear load); ≤ 5% (non-linear load)	
Power Factor	1	
Overload Capability	≤ 125%: 10 mins; ≤ 150%: 1 min; > 150%: 1 sec	
Current Crest Ratio	3:1	
EFFICIENCY		
Online Mode	Up to 96.2%	
Eco Mode	Up to 99%	
BATTERY		
Battery Type	VRLA/Lithium-ion	
Nominal Voltage	±180-±276 Vdc (configurable, ±240 Vdc default)	
Quantity	30-46 pcs (configurable)	
Maximum Charge Current	32 A	48 A
COMMUNICATION INTERFACE		
Display	10-inch color touchscreen	
Port	Smart slot x1, Modbus port (RS-485), REPO, EMS/Console (RJ45), BMS (RS-485), Ethernet port x1, Input dry contact x4, Output dry contact x6, External battery temperature detection x4, External switch/breaker status dry contact x4	
Protocols	SNMP, Modbus RTU, Modbus TCP/IP, HTTP(S), SNTP, SMTP, Syslog, BOOTP, DHCP	
PHYSICAL		
Dimensions (W x D x H)	600 x 850 x 1445 mm	
Net Weight	UPS System	162 kg
	Per Power Module	18 kg
ENVIRONMENT		
Operating Temperature	0 to 40°C	
Humidity	0-95% (non-condensing)	
Altitude	0-1000 m	
Storage Temperature	-20 to 70°C	
CONFORMANCE		
Safety	CE, UKCA, RCM, BSMI	
EMC	IEC 62040-2	
Performance	IEC 62040-3	
Sustainability	RoHS, REACH	
FEATURES		
Standard	Sequential start for generator, Burn-in test without load bank, Cold start function, Frequency conversion, Failure prediction	
Optional	Software integration with Delta lithium-ion battery BMS	

(1) Input voltage total harmonic distortion < 1%

All specifications are subject to change without prior notice.



Modulon DPH Series UPS

Three-phase, 20-80/50-200 kVA

Experience unmatched power solutions with our advanced 80K and 200K UPS models. The DPH-80K-FR is crafted to seamlessly integrate a battery in a 42U rack, and both models boast high power density, exceptional reliability, and fault tolerance—perfect for small and medium data centers. Enjoy exceptional energy efficiency with up to 96.5% AC-AC efficiency and an exclusive green mode, ensuring optimal system performance. Opt for our modular UPS for unparalleled flexibility that scales seamlessly with your growing business.



Low Total Cost of Ownership

- AC-AC efficiency up to 96.5% and Eco mode to 99% optimize energy costs
- Activate Green mode with a load aggregation function to boost system efficiency
- Remarkable power density of 50 kW per module in a 3U height (20 kW/2U height) offering best space utilization
- Unleash the on-site full-load and full-battery test. No need for load banks, no set-ups streamline the process and cut costs effectively

Maximum Uptime

- Redundant components and dual CAN bus deliver the highest system availability and thwart single point of failure
- Power and control modules self-synchronize to prevent downtime from control module failure
- Fully modularized design and hot swappable STS module, power module and controller card ensure minimizing Mean Time To Repair (MTTR)
- Integrated manual bypass eliminates maintenance-related downtime
- Pre-warning of key components aging reduces downtime risk (optional)

Easy Management

- Precisely meet your power backup needs now and unlock the ability to effortlessly scale up as your business flourishes
- Color 10” touchscreen provides easy access to UPS information and streamlined operation
- Intuitive LCD integrated UPS system, inbuilt battery and environment information are visible and easy to manage
- Built-in USB port provides effortless connectivity to over 10,000 data logs for event diagnosis



IT



Telecom



Industrial



Transportation



Financial



Government

Technical Specifications

Model	DPH-80K-FR	DPH-200K-FR
Power Rating	20/40/60/80 kVA 20/40/60/80 kW	50/100/150/200 kVA 50/100/150/200 kW
Frame Size	80 kW	200 kW
Parallel Configuration	Up to 8 units	
INPUT		
Nominal Voltage	380/400/415 Vac, 3P4W+PE	
Voltage Range	305-477 Vac (100% load); 229-305 Vac (with derating to 70-100% load)	
Frequency Range	40-70 Hz	
Total Harmonic Distortion (THDi)	< 3%	
Power Factor	> 0.99 (100% load)	
OUTPUT		
Nominal Voltage	380/400/415 Vac, 3P4W+PE	
Voltage Regulation	±1% (static)	
Frequency	50/60 ± 0.05 Hz	
Total Harmonic Distortion (THDv)	≤ 1% (linear load); ≤ 5% (non-linear load)	
Power Factor	1	
Overload Capability	≤ 125%: 10 mins; ≤ 150%: 1 min; > 150%: 1 sec	
Current Crest Ratio	3:1	
EFFICIENCY		
Online Mode	Up to 96.5%	
Eco Mode	Up to 99%	
BATTERY		
Battery Type	VRLA	VRLA/Lithium-ion
Nominal Voltage	±240 Vdc	
Quantity	40 pcs (12V VRLA battery)	30 ⁽¹⁾ -46 pcs (configurable, 12V VRLA battery)
Maximum Charge Current	32 A	75 A
Internal Battery	Optional, up to 5 strings	N/A
External Battery Cabinet (Optional)	Parallel to 4 cabinets ⁽²⁾	
COMMUNICATION INTERFACE		
Display	10-inch color touchscreen	
Port	Modbus (RS-485) port, REPO, EMS/Console (RJ45), BMS (RS-485), Ethernet port x1, Input dry contact x4, Output dry contact x6, External battery temperature detection x4, External switch/breaker status dry contact x4	
Protocols	SNMP, Modbus RTU, Modbus TCP/IP, HTTP(S), SNTP, SMTP, Syslog, BOOTP, DHCP	
PHYSICAL		
Dimensions (W x D x H)	600 x 1109 x 2000 mm	
Net Weight	UPS System	269 kg
	Per Power Module	18 kg
	Per Battery Module ⁽²⁾	32.6 kg
ENVIRONMENT		
Operating Temperature	0 to 40°C	
Humidity	0-95% (non-condensing)	
Altitude	0-1000 m	
CONFORMANCE		
Safety	CE, UKCA, RCM, BSMI	
EMC	IEC 62040-2	
Performance	IEC 62040-3	
Sustainability	RoHS, REACH	
FEATURES		
Standard	Sequential start for generator, Burn-in test without load bank, Cold start function, Frequency conversion, Failure prediction	
Optional	Software integration with Delta Lithium-ion battery BMS	

(1) 30-34 batteries must be set up by authorized personnel, with load derating required.

(2) Up to 10 battery strings per cabinet, featuring 40 pcs x12V 9Ah VRLA batteries each; 4 battery modules compose 1 string

All specifications are subject to change without prior notice.



Modulon DPH Series UPS

Three-phase, 50-300/500/600 kVA

In this IT intensive world with heavy data traffic driven by cloud, 4G/5G and media streaming applications, IT managers are facing the challenges of increasing rack power density and limited data center space. Delta's innovative modular UPS technologies provide the answer to customers' demands for high power density, high power performance, and ultimate availability. The brand-new Delta Modulon DPH series UPS 50-300/500/600 kVA achieves the industry's leading power density of 50 kW per module, offering the smallest footprint and best space utilization. The Modulon DPH Series UPS is the ideal modular power protection for MW data centers to achieve total cost of ownership (TCO) optimization.



Excellent Power Performance

- The industry's leading power density per module at 50 kW in a 3U space, and the smallest footprint for 500 kVA in a single rack and 600 kVA in two racks, that achieves the best utilization compared with its peers
- High AC-AC efficiency up to 96.5% and ECO mode to 99% provide marked energy cost savings
- Green mode featuring a load aggregation function optimizes system efficiency

Ultimate Availability

- Fully modularized design and hot-swappable key modules ensure Mean Time To Repair (MTTR) close to zero without downtime risk
- Redundant components and dual CAN bus delivers highest system availability and avoids single point of failure
- Modular UPS grows with your business by parallel expansion up to 8 units for 4.8 MVA of total power capacity

High Manageability

- User-friendly 10" color touchscreen enables easy local UPS management
- Environment information such as security, water, fire, and temperature can be integrated into the UPS for easy monitoring via the LCD of the UPS
- If the UPS is equipped with an external battery management system, the battery information can be integrated into the UPS and monitored via the LCD of the UPS



IT



Telecom



Industrial



Transportation



Financial



Government

Technical Specifications

Model	DPH-300K	DPH-500K	DPH-600K
Power Rating	100/150/200/250/300 kVA	300/350/400/450/500 kVA	500/550/600 kVA
	100/150/200/250/300 kW	300/350/400/450/450 kW	500/550/600 kW
Frame Size	300 kW	450 kW	600 kW
Parallel Configuration	Up to 8 units		
INPUT			
Nominal Voltage	380/400/415 Vac, 3P4W+PE		
Voltage Range	305-478 Vac (100% load); 229-305 (with derating to 70-100% load)		
Frequency Range	40-70 Hz		
Total Harmonic Distortion (THDi)	< 3%(1)		
Power Factor	> 0.99 (100% load)		
OUTPUT			
Nominal Voltage	380/400/415 Vac, 3P4W+PE		
Voltage Regulation	±1%		
Frequency	50/60 ± 0.05 Hz		
Total Harmonic Distortion (THDv)	≤ 0.5% (linear load)		
Power Factor	1(2)		
Overload Capability	≤ 125%: 10 mins; ≤ 150%: 1 min; > 150%: 1 sec		
Current Crest Ratio	3:1		
EFFICIENCY			
Online Mode	Up to 96.5%		
ECO Mode	Up to 99%		
BATTERY			
Battery Type	VRLA/Lithium-ion		
Nominal Voltage	±240 Vdc		
Quantity	30(3)-46 pcs (Configurable, 12V VRLA battery)		
Maximum Charge Current	90 A	135 A	180 A
COMMUNICATION INTERFACE			
Display	10-inch color touchscreen		
Port	Modbus (RS-485), Smart slot, REPO, Input dry contact x4, Output dry contact x6, External battery temperature detection x4, External switch/breaker status dry contact x4, BMS (RS-485), EMS/Console (RJ45), Ethernet port		
Protocols	SNMP, Modbus RTU, Modbus TCP/IP, HTTP(S), SNTp, SMTP, Syslog, BOOTP, DHCP		
PHYSICAL			
Dimensions (W x D x H)	600 x 1100 x 2000 mm		1200 x 1100 x 2000 mm
Net Weight	UPS System	317 kg	605 kg
	Per Power Module	36 kg	
ENVIRONMENT			
Operating Temperature	0 to 40°C		
Humidity	0-95% (non-condensing)		
Altitude	0-2000 m (derating 1%/100m from 1001-2000 m)		
Storage Temperature	-20 to 70°C		
CONFORMANCE			
Safety	CE, UKCA		
EMC	IEC 62040-2		
Performance	IEC 62040-3		
Sustainability	RoHS, REACH		
FEATURES			
Standard	Sequential start for generator, Backfeed protection, Burn-in test without load bank, Cold start function, Frequency conversion, Failure prediction		
Optional	Software integration with Delta Lithium-ion battery BMS		

(1) When input vTHD < 1%

(2) 0.9 for the DPH-500K model

(3) 30-34 batteries must be set up by authorized personnel, with load derating required.

All specifications are subject to change without prior notice.

Ultron HPH Gen2 Series UPS

Three-phase, 20-40 kVA

The HPH Gen2 20-40 kVA UPS offers a best in class footprint and high-level performance. With advanced technology and thermal management, it achieves the world's leading power density and promises 40°C without de-rating. The 0.99 input PF and iTHD < 2% ensure maximum upstream source compatibility. Low total cost of ownership is achieved by > 96% efficiency, energy recycle mode, wider battery quantity configuration and inbuilt 15 A charger. In addition, it provides a user-friendly interface touch panel, manual protection devices and caster wheels for easy deployment, installation and operation. All these features provide the ideal solution for various small and medium-sized data centers and critical power backups.



Easy Deployment and Maintenance with Compact Design

- Inbuilt casters for easy move-in, positioning and maintenance
- Inbuilt input/ bypass input/ output/ maintenance bypass breakers for completed distribution panel
- Slim design and smallest footprint (40 kW in 0.15 m²) to reduce wasted space

Low Total Cost of Ownership

- Wide battery quantity configuration (30-46 pcs) optimizes the battery solution
- High AC-AC efficiency over 96% and ECO mode to 99% provide marked energy cost savings
- Low input harmonic distortion (iTHD < 2%) is highly compatible with upstream UPS power without additional filter or over sizing generator

High Manageability and Flexibility

- User-friendly 5-inch color touchscreen enables easy local UPS management
- Optional SNMP IPv6 and Modbus communication cards for remote monitoring
- Inbuilt 15 A charger for long backup solution without additional cost
- Optional IP42 kit for harsh environment applications
- Front access and easy battery replacement for inbuilt battery models

Technical Specifications

Model	HPH G2-	20K/ 20KB ⁽¹⁾ / 20KB-N ⁽¹⁾	30K/ 30KB ⁽¹⁾ / 30KB-N ⁽¹⁾	40K/ 40KB ⁽¹⁾ / 40KB-N ⁽¹⁾
Power Rating		20 kVA 20 kW	30 kVA 30 kW	40 kVA 40 kW
Parallel Configuration		Up to 4 units		
INPUT				
Nominal Voltage		380/400/415 Vac, 3P4W+PE		
Voltage Range		305-478 Vac (100% load); 228-305 Vac (with derating to 70-100% load)		
Frequency Range		40-70 Hz		
Total Harmonic Distortion (THDi)		≤ 3%	≤ 2%	
Power Factor		> 0.99 (100% load)		
OUTPUT				
Nominal Voltage		380/400/415 Vac, 3P4W+PE		
Voltage Regulation		±1%		
Frequency		50/60 ± 0.05 Hz		
Total Harmonic Distortion (THDv)		≤ 1.5% (linear load); ≤ 4% (non-linear load)		
Power Factor		1		
Overload Capability		≤ 105%: continues; > 105-110%: 60 mins; > 110-≤ 125%: 10 mins; > 125-≤ 150%: 1 min; > 150%: 1 sec		
Current Crest Ratio		3:1		
EFFICIENCY				
Online Mode		Up tp 96%		
ECO Mode		Up to 99%		
BATTERY				
Battery Type		VRLA		
Nominal Voltage		±240 Vdc		
Quantity		30 ⁽²⁾ -46 pcs		
Maximum Charge Current		15 A		
COMMUNICATION INTERFACE				
Display		LCD touchscreen		
Port		Mini Slot x2 ,USB x1, RS-232 x1, Input dry contact x2, Output dry contact x4, External battery temperature dry contact x1, REPO x1		
Protocols		SNMP, Modbus TCP/IP, HTTP(S), SNTP, SMTP, BOOTP, DHCP, SSH, SFTP, FTP, Telnet, Syslog		
PHYSICAL				
Dimensions (W x D x H)	External Battery Model	240 x 630 x 650 mm		
	Integrated Battery Model	470 x 780 x 1200 mm		
Net Weight	External Battery Model	44 kg	50 kg	
	Integrated Battery Model	334 kg (with Battery)	340 kg (with Battery)	
		94 kg (without Battery)	100 kg (without Battery)	
ENVIRONMENT				
Operating Temperature		0 to 50°C (40 to 50°C de-rating to 90% load)		
Humidity		0-95% (non-condensing)		
Audible Noise		< 50 dBA	< 56 dBA	
Altitude		0-2000 m (derating 1%/100m from 1000-2000 m)		
Storage Temperature		-25 to 70°C		
CONFORMANCE				
Safety		CE, UKCA, RCM		
EMC		IEC 62040-2		
Performance		IEC 62040-3		
Sustainability		RoHS, REACH		
FEATURES				
Standard		Cold start function, Frequency conversion		

(1) HPH-B: UPS with inbuilt battery. HPH-B-N: UPS with battery kit, no battery.

(2) 30-34 pcs required load derating.

All specifications are subject to change without prior notice.



IT



Telecom



Industrial



Transportation



Financial



Government

Ultron HPH Series UPS

Three-phase, 60-120 kVA

Elevate your power game with the Ultron HPH UPS: unbeatable energy efficiency and superior performance for mission-critical applications and small data centers. Fully rated power, advanced IGBT topology, and Delta's digital PFC controls ensure uninterrupted power excellence. Unleash uncompromised power with the Delta HPH UPS!



Best-in-Class Power Performance and Efficiency

- Fully rated power (kVA=kW) for maximum power availability
- Leading AC-AC efficiency up to 96% saves energy costs
- Low harmonic pollution (iTHD < 3%) and high input power factor (> 0.99) reduce upstream investment costs

Assured Reliability

- Wide input voltage range allows the UPS to operate in harsh electrical environments and extends battery life
- DSP based technology enables a reduction in the number of electronic components to lower the failure rate
- Redundant auxiliary power and static switch control circuit* design prevents single point of failure

(* Applicable to HPH-100/120K)

Greater Flexibility

- A wide choice of configurations, such as N+X redundancy and hot stand-by
- Adjustable charging current and charging voltage meet different battery configuration requirements
- Flexible battery configuration optimizes battery investment

Superior Serviceability and Management

- Swappable interior architecture and front access servicing enables quick and easy maintenance
- Multi-connectivity interface supports remote UPS monitoring and management



IT



Telecom



Industrial



Transportation



Financial



Government

Technical Specifications

Model	HPH-60K		HPH-80K		HPH-100K		HPH-120K	
Power Rating	60 kVA		80 kVA		100 kVA		120 kVA	
	60 kW		80 kW		100 kW		120 kW	
Parallel Configuration	Up to 4 units							
INPUT								
Nominal Voltage	380/400/415 Vac, 3P4W+PE							
Voltage Range	332-477 Vac (100% load); 229-332 Vac (with derating to 63-100% load)							
Frequency Range	40-70 Hz							
Total Harmonic Distortion (THDi)	< 3%							
Power Factor	> 0.99 (100% load)							
Short Circuit Withstand Rating	15 A		22 A					
OUTPUT								
Nominal Voltage	380/400/415 Vac, 3P4W+PE							
Voltage Regulation	±1%							
Frequency	50/60 ± 0.05 Hz							
Total Harmonic Distortion (THDv)	≤ 2% (linear load)							
Power Factor	1							
Overload Capability	≤ 125%: 10 mins; 126-150%: 1 min; > 150%: 1 sec							
Current Crest Ratio	3:1							
EFFICIENCY								
Online Mode	> 96%							
ECO Mode	Up to 99%							
BATTERY								
Battery Type	VRLA/ Lithium-ion							
Nominal Voltage	±240 Vdc							
Quantity	32-46 pcs ⁽¹⁾							
Charge Current	10 A		15 A		20 A			
Max. Charger Current with Optional Charger Board	20 A				40 A			
COMMUNICATION INTERFACE								
Display	LCD display with LED indicators							
Port	Smart slot x1, Mini slot x1, Parallel port x2, RS-232 x1, Charger detection port x1, Input dry contact x2, Output dry contact x6, USB x1, REPO port x1, External battery temperature sensing port x2							
Emergency Power Off	Yes							
PHYSICAL								
Dimensions (W x D x H)	520 x 800 x 1175 mm				520 x 800 x 1760 mm			
Net Weight	186.5 kg		191 kg		312 kg			
Packing Dimensions (W x D x H)	685 x 1003 x 1337 mm				720 x 994 x 1952 mm			
Packing Weight	220.5 kg		225 kg		388 kg			
ENVIRONMENT								
Operating Temperature	0 to 45°C (40 to 45°C with load derating)							
Humidity	5-95% (non-condensing)							
Altitude	0-1000 m (without derating)							
Storage Temperature	-20 to 50°C							
CONFORMANCE								
Safety	CE, UKCA							
EMC	IEC 62040-2							
Performance	IEC 62040-3							
Sustainability	RoHS, REACH							
FEATURES								
Standard	Backfeed protection, Cold start function, Synchronized multiple bus (SMB), frequency conversion, dual input							

(1) 32-36 pcs require service setting and load derating

All specifications are subject to change without prior notice.

Ultron HPH Series UPS

Three-phase, 160/200 kVA

The brand-new Ultron HPH series 160-200 kVA is a true online double-conversion UPS offering the best-in-class combination of power performance and efficiency for medium data centers, pan-IT, and other mission critical applications. The Ultron HPH features up to 96.5% AC-AC efficiency, low iTHD < 3%, and high input power factor > 0.99 resulting in significant total cost of ownership (TCO) savings. Highlights of the highly reliable Ultron HPH series UPS design include key component redundancy and proactive battery health detection. With its combination of superior availability and power performance, the Ultron HPH 160-200 kVA is the top choice for power protection of sustainable medium business operations.



Best-in-Class Power Performance and Efficiency

- High AC-AC efficiency of up to 96.5% and ECO mode to 99% for significant energy cost savings
- Low harmonic pollution (iTHD < 3%) and high input power factor (> 0.99) reduce upstream investment costs

Assured Availability

- Optional redundant controller supports dual CAN bus and ring connection for high system availability
- Proactive battery aging detection for high reliability
- Easy event log check via touch panel and firmware upgrade via USB port

Greater Flexibility

- Parallel expansion and redundancy up to 8 units, 1.6 MVA of total power capacity
- Flexible battery configuration for 30-46 pieces optimizes battery investment
- Supports either top or bottom cable entry in the single cabinet. The unique fixed symmetric terminal design avoids cable bending issues to enhance cable reliability

Superior Manageability

- User-friendly 10-inch colored LCD with touch panel enables easy local UPS management
- Environment information such as security, water, fire and temperature can be integrated into the UPS for easy monitoring via the LCD of the UPS
- If the UPS features Delta's battery management system, the battery information integrates seamlessly for LCD monitoring

Technical Specifications

Model	HPH-160K	HPH-200K
Power Rating	160 kVA 160 kW	200 kVA 200 kW
Parallel Configuration	Up to 8 units	
INPUT		
Nominal Voltage	380/400/415 Vac, 3P4W+PE	
Voltage Range	305-477 Vac (100% load); 228-305 Vac (with derating to 70-100% load)	
Frequency Range	40-70 Hz	
Total Harmonic Distortion (THDi)	≤ 3% ⁽¹⁾	
Power Factor	> 0.99 (100% load)	
OUTPUT		
Nominal Voltage	380/400/415 Vac, 3P4W+PE	
Voltage Regulation	±1%	
Frequency	50/60 ± 0.05 Hz	
Total Harmonic Distortion (THDv)	≤ 0.5% (linear load)	
Power Factor	1	
Overload Capability	≤ 125%: 10 mins; ≤ 150%: 1 min; > 150%: 1 sec	
Current Crest Ratio	3:1	
EFFICIENCY		
Online Mode	Up to 96.5%	
Eco Mode	Up to 99%	
BATTERY		
Battery Type	VRLA	
Nominal Voltage	±240 Vdc	
Quantity	30-46 pcs	
Maximum Charge Current	45 A	60 A
COMMUNICATION INTERFACE		
Display	10-inch color touchscreen	
Port	Modbus (RS-485), BMS (RS-485), EMS/Console (RJ45), SMART slot x1, REPO x1, Input dry contact x4, Output dry contact x6, External battery temperature dry contact x4, External switch/breaker status dry contact x4	
Protocols	SNMP, Modbus RTU, Modbus TCP/IP, HTTP(S), SNTP, SMTP, Syslog, BOOTP, DHCP	
PHYSICAL		
Dimensions (W x D x H)	600 x 1100 x 1600 mm	
Net Weight	340 kg	376 kg
ENVIRONMENT		
Operating Temperature	0 to 40°C	
Humidity	0-95% (non-condensing)	
Altitude	0-1000 m	
Storage Temperature	-25 to 70°C	-20 to 70°C
CONFORMANCE		
Safety	CE, UKCA, RCM	
EMC	IEC 62040-2	
Performance	IEC 62040-3	
Sustainability	RoHS, REACH	
FEATURES		
Standard	Backfeed protection, Cold start function, Frequency conversion, Synchronized multiple bus, DC battery ground fault	

(1) When input vTHD < 1%

All specifications are subject to change without prior notice.



IT



Telecom



Industrial



Transportation



Financial



Government

Ultron IPT Series UPS

Three-phase 20-200 kVA

In the age of Industry 4.0, the integration of advanced sensors, controllers, and robotics has transformed manufacturing into a more electro-intensive sector than ever before. Ensuring stable and continuous power is now crucial for business continuity. The IPT series, an industrial transformer-based UPS, employs a Power Factor Correction (PFC) converter, replacing the traditional 6-pulse and 12-pulse rectifier structures. This upgrade enhances both input Total Harmonic Distortion (THDi) and input power factor, helping you save dramatically on frontend investment while providing unrivaled reliability in challenging environments.



Unrivaled Resilience

- Output Zig-zag transformer provides solid load galvanic separation, withstands heavier unbalanced loads, and delivers full kVA output capacity
- Excellent short-circuit capability from load: 3.3 times the rated current, 35% beyond a conventional transformerless UPS
- Industrial robust mechanical design provides enclosure protection level up to IP43 (optional), and resists water, liquids, conductive dust, high temperatures and earthquakes
- Key component redundancy ensures uninterruptible operation

Cost Efficiency

- Active Power Factor Correction dramatically reduces input current harmonics (THDi < 3%), minimizing distortion to upstream equipment, and optimizes frontend investment from generator, cabling and breaker, eliminating the cost of additional harmonic filters and aiding factory compliance with energy regulations
- Surpassing input power factor > 0.99 exceeds industrial UPS standards, minimizing energy waste consumption and optimizing system efficiency
- Maximizes UPS performance and lifespan with self-diagnosis and key component analysis

Low Total Cost Of Ownership

- Easy to use: waterproof 10” color touchscreen (IP54)
- Easy to maintain: supports full front access
- Easy to install: provides both bottom and top (optional) cable entry



Industrial



Oil & Gas



Chemical Industry



Transportation



Healthcare

Technical Specifications

Model	IPT-	20K ⁽¹⁾	30K ⁽¹⁾	40K ⁽¹⁾	50K ⁽¹⁾	60K ⁽¹⁾	80K ⁽¹⁾	100K ⁽¹⁾	120K	160K ⁽¹⁾	200K ⁽¹⁾
Power Rating	kVA	20	30	40	50	60	80	100	120	160	200
	kW	18	27	36	45	54	72	90	108	144	180
Parallel Configuration	Up to 8 units										
INPUT											
Nominal Voltage	380/400/415 Vac, 3P4W+PE/3P3W+PE										
Voltage Range	324-477 Vac (100% load); 286-324 Vac (with derating to 70-100% load)										
Frequency Range	40-70 Hz										
Total Harmonic Distortion (THDi)	< 3%										
Power Factor	> 0.99 (100% load)										
OUTPUT											
Nominal Voltage	380/400/415 Vac, 3P4W+PE (3P3W+PE optional)										
Voltage Regulation	±1% (static); ±3% (dynamic)										
Frequency	50/60 ± 0.05 Hz										
Total Harmonic Distortion (THDv)	< 2% (linear load); <5% (non-linear load)										
Power Factor	0.9										
Permitted Load Power Factor	leading 0.8 ~ lagging 0.7 (without derating)										
Overload Capability	≤ 110%: 60 mins; 111-125%: 10 mins, 126-150%: 1 min, >150%: 1 sec										
Current Crest Ratio	3:1										
EFFICIENCY											
Online Mode	Up to 94.5%										
ECO Mode	Up to 97.5%										
BATTERY											
Battery Type	VRLA/Lithium-ion										
Nominal Voltage	393 Vdc										
Quantity	36-44 pcs										
Operational Voltage Limits	346-638 Vdc										
Maximum Charge Current	10 A	12 A	15 A	17 A	30 A		38 A	45 A	60 A	75 A	
COMMUNICATION INTERFACE											
Display	10-inch color LCD touchscreen										
Port	USB port x1, RS-232 x1, Input dry contacts x4, Output dry contacts x6, Network port x1, REPO x1, Modbus (RS-485) x1										
Remote Emergency Power Off (REPO)	Standard										
Protocols	SNMP, Modbus RTU, Modbus TCP/IP, HTTP(S), SNTP, SMTP, DHCP										
PHYSICAL											
Dimensions (W x D x H)	mm	600 x 830 x 1420						800 x 830 x1570		1200 x 830 x1700	
Net Weight	kg	* (2)	* (2)	404		* (2)	* (2)	593		* (2)	* (2)
ENVIRONMENT											
Operating Temperature	0 to 40°C										
Humidity	0-95% (non-condensing)										
Altitude	0-2000 m (derating 1%/100m from 1000-2000 m)										
Storage Temperature	-20 to 70°C										
Storage Humidity	0-95%										
Ingress Protection Level	IP20, IP43 (optional)										
CONFORMANCE											
Safety	CE										
EMC	IEC 62040-2										
Performance	IEC 62040-3										
Sustainability	RoHS, REACH										
FEATURES											
Standard	Cold start, Battery shunt trip, Frequency conversion, Power walk-in										
Optional	Synchronized multiple bus (SMB), Backfeed protection with contactor, Software integration with Delta Lithium-ion battery BMS, DC battery ground fault detector										

(1) Upcoming product

(2) To be released

All specifications are subject to change without prior notice.

Ultron DPS Gen2 Series UPS

Three-phase, 300-1200 kVA

Delta's superior Ultron DPS series 300-1200 kVA UPS supports unity output power factor to deliver up to 9.6 MW power capacity to meet the demands of large data centers and colocations. The Ultron DPS series guarantees the highest level of system reliability by supporting self-detection of key components with pre-warning function, multi-layered redundancy design, and complete power rating coverage. Along with optional battery management software, the DPS series enables users to achieve predictive maintenance and minimize system downtime, while lowering the total cost of ownership (TCO).



Ultimate Availability


- Supports up to 9.6 MW power capacity with parallel redundancy and expansion up to 8 units
- Redundant components and dual CAN bus ensures system availability
- Proactive detection of key component status for early diagnosis of UPS malfunction
- Intelligent battery health diagnosis enables better battery maintenance and replacement
- Advanced event analysis, including 10,000 event logs, waveform capturing and key parameters recording, to detect UPS abnormality and ensure higher availability

Excellent Performance


- The industry's leading power density and smallest footprint with the design of both top/bottom cable entry* and inbuilt switches (* For DPS-300K, only top cable entry is available)
- Unity output power factor guarantees no-rating and provides 100% kW
- AC-AC efficiency of up to 96.5% and 99% in ECO mode provides marked energy cost savings
- Supports both VRLA and environment-friendly Li-ion batteries

Sophisticated Manageability and Flexibility


- Environment information, such as security, water, fire, and temperature can be integrated and monitored via the LCD panel of the UPS
- If the UPS is equipped with an external battery management system, the battery information can be integrated and monitored via the LCD panel of the UPS
- Flexible battery quantity of 30-46 pcs achieves optimal battery investment




IT




Telecom




Industrial



Transportation



Financial



Government

Technical Specifications

Model	DPS G2-	300K	400K	500K	600K	800K	1000K	1200K
Power Rating		300 kVA	400 kVA	500 kVA	600 kVA	800 kVA	1000 kVA	1200 kVA
		300 kW	400 kW	500 kW	600 kW	800 kW	1000 kW	1200 kW
Parallel Configuration		Up to 8 units						
INPUT								
Nominal Voltage		380/400/415 Vac, 3P4W+PE						
Voltage Range		305 ⁽¹⁾ -477 Vac (100% load); 229-305 Vac (with derating to 70-100% load)						
Frequency Range		40-70 Hz						
Total Harmonic Distortion (THDi)		< 3% (linear load); < 5% (non-linear load)						
Power Factor		> 0.99 (100% load)						
Short Circuit Withstand Rating		65 kA					100 kA	
OUTPUT								
Nominal Voltage		380/400/415 Vac, 3P4W+PE						
Voltage Regulation		±1%						
Frequency		50/60 ± 0.05 Hz						
Total Harmonic Distortion (THDv)		< 1.5% (linear load); < 5% (non-linear load)						
Power Factor		1						
Overload Capability		≤ 125%: 10 mins; ≤ 150%: 1 min; > 150%: 1 sec						
Current Crest Ratio		3:1						
EFFICIENCY								
Online Mode		Up to 96.5%						
ECO Mode		Up to 99%						
BATTERY								
Battery Type		VRLA/Lithium-ion						
Nominal Voltage		480 Vdc						
Quantity		30 ⁽²⁾ -46 pcs (Configurable, 12V VRLA battery)						
Maximum Charge Current		90 A	120 A	150 A	180 A	240 A	300 A	360 A
COMMUNICATION INTERFACE								
Display		10-inch color touchscreen						
Port		Modbus (RS-485), Smart slot, REPO, Input dry contact x4, Output dry contact x6, External switch/breaker status dry contact x4, External battery temperature detection x4, Ethernet port, BMS (RS-485), EMS/ Console (RJ45)						
Protocols		SNMP, Modbus RTU, Modbus TCP/IP, HTTP(S), SNTP, SMTP, Syslog, BOOTP, DHCP						
PHYSICAL								
Dimensions (W x D x H)		600 ⁽³⁾ x 900 x 2000 mm	1200 ⁽³⁾ x 900 x 2000 mm			1800 x 900 x 2000 mm	2450 x 900 x 2000 mm	
Net Weight		515 kg	700 kg	811 kg	970 kg	1270 kg	1850 kg	2000 kg
ENVIRONMENT								
Operating Temperature		0 to 40°C						
Humidity		0-95% (non-condensing)						
Altitude		0-2000 m (derating 1%/100m from 1001-2000 m)						
Storage Temperature		-25 to 70°C						
CONFORMANCE								
Safety		CE, UKCA						
EMC		IEC 62040-2						
Performance		IEC 62040-3						
Sustainability		RoHS, REACH						
FEATURES								
Standard		Sequential start for generator, Backfeed protection, Burn-in test without load bank, Cold start function, Frequency conversion, Failure prediction						
Optional		Software integration with Delta Lithium-ion battery BMS						

(1) 305-324 Vac with conditional application
(2) 30-36 batteries must be set up by authorized personnel, with load derating required
(3) The width of the UPS includes 4 built-in switches

All specifications are subject to change without prior notice.



Ultron DPM Gen2 Series UPS

Three-phase, 250-1750 kVA

Selected by leading global cloud providers, Delta’s DPM Gen2 introduces advanced features for enhanced efficiency and reliability. This includes OPEX savings with up to 97.3% AC-AC efficiency and improved grid stability. Synchronized Multiple Bus (SMB) and parallel scalability ensures flawless reliability, making it the ideal solution for fortified hyperscale data centers.



OPEX Savings


- AC-AC efficiency up to 97.3%, efficiency optimization at light loads saves energy costs
- Clean mode (voltage independent mode) up to 99% efficient guarantees the optimum power condition while maintaining the highest level of efficiency
- Optimizes energy cost with off-peak charging, avoiding peak-time expense
- Elevates grid stability through responsive demand reduction and fast frequency regulation, triggers upon utility requests for eligible bill subsidies

Impeccable Reliability


- Assures smooth power transitions with integrated Synchronized Multiple Bus (SMB), minimizing transformer inrush currents and maintaining balanced power from dual sources
- Parallels up to 8 units for redundancy or expansion, supported by N+1 internal redundancy in power modular configuration
- Maximizes UPS performance and lifespan with self-diagnosis and key component analysis

Ultimate Availability


- Lithium-ion battery ready. Adjustable battery charging voltage adapts to multiple types of batteries
- Seamless power shifts to generator with an advance power walk-in function, pausing during frequency issues for smooth transitions without unnecessary generator sizing expansion
- Grid interactive application. Provides corrective operation for unstable renewal energy sources with an innovative topology design that handles grid and battery power at the same time
- Easy mounting/cabling that supports both top and bottom cable entry and full front access




IT




Telecom




Industrial



Transportation



Financial



Government

Technical Specifications

Model	DPM G2-	250K	500K ⁽¹⁾	750K ⁽¹⁾	1000K	1250K	1500K ⁽¹⁾	1750K ⁽¹⁾
Power Rating		250 kVA 250 kW	500 kVA 500 kW	750 kVA 750 kW	1000 kVA 1000 kW	1250 kVA 1250 kW	1500 kVA 1500 kW	1750 kVA 1750 kW
Parallel Configuration		Up to 8 units						
INPUT								
Nominal Voltage		380/400/415 Vac, 3P3W+PE or 3P4W+PE						
Voltage Range		323-477 Vac (100% load)						
Frequency Range		40-70 Hz						
Total Harmonic Distortion (THDi)		< 3% (100% resistive load)						
Power Factor		> 0.99 (100% load)						
Short Circuit Withstand Current		65 kA			100 kA			
OUTPUT								
Nominal Voltage		380/400/415 Vac, 3P3W+PE or 3P4W+PE						
Voltage Regulation		±1% (static)						
Frequency		50/60 ± 0.05 Hz						
Total Harmonic Distortion (THDv)		< 1% (linear load)						
Overload Capability		< 110%: continues; 110-125%: 10 mins; 126-150%: 1 min; > 150%: 1 sec						
Current Crest Ratio		3:1						
EFFICIENCY								
Online Mode		Up to 97.3%						
Clean Mode (VI)		Up to 99%						
BATTERY								
Battery Type		VRLA/Vented lead-acid/Lithium-ion/Ni-Zinc						
Nominal Voltage		480 Vdc						
Quantity		34-35 ⁽²⁾ , 36-46 pcs (Configurable, 12V VRLA battery)						
Charge Current		125 A	* ⁽³⁾	* ⁽³⁾	500 A	625 A	* ⁽³⁾	* ⁽³⁾
Protection Design		Battery shunt trip x1, Battery temperature detection x4, Battery breaker status dry contact x1						
COMMUNICATION INTERFACE								
Display		10-inch color touchscreen						
Port		Smart slot x2, Modbus (RS-485) port x1, REPO port x1, Input dry contact x6, Output dry contact x6, Synchronized Multiple Bus (SMB) x2, Breaker status detection x4, EMS/Console port x1, Ethernet x1						
Protocols		SNMP, Modbus RTU, Modbus TCP/IP, HTTP(S), SNTP, SMTP, BOOTP, DHCP						
PHYSICAL								
Dimensions (W x D x H)		1030 x 990 x 2000 mm	* ⁽³⁾		3070 x 990 x 2000 mm	3400 x 990 x 2000 mm	* ⁽³⁾	
Net Weight		675.5 kg	* ⁽³⁾		2408 kg	2779 kg	* ⁽³⁾	
ENVIRONMENT								
Operating Temperature		0 to 40°C						
Humidity		0-95% (non-condensing)						
Altitude		0-2000 m (derating 1%/100m from 1001-2000 m)						
CONFORMANCE								
Safety		CE, UKCA						
EMC		IEC 62040-2						
Performance		IEC 62040-3						
Sustainability		RoHS, REACH, Energy Star 2.0						
FEATURES								
Standard		Advance power walk-in for generator, Backfeed protection with contactor, Burn-in test without load bank, Cold start function, Synchronized multiple bus (SMB), Frequency conversion, Battery shunt trip, Auxiliary power 48 Vdc for shunt trip, Failure prediction						
Optional		Grid interactive, Software integration with Delta Lithium-ion battery BMS, DC battery ground fault detector, Integrated battery switch cabinet, IR scan window						

(1) Upcoming product
(2) 34-35 pcs require service setting and load derating
(3) To be released

All specifications are subject to change without prior notice.



Ultron DPM Gen2 Series UPS

Three-phase, 300-2100 kVA

Selected by leading global cloud providers, Delta’s DPM Gen2 introduces advanced features for enhanced efficiency and reliability. This includes OPEX savings with up to 97.5% AC-AC efficiency and improved grid stability. Synchronized Multiple Bus (SMB) and parallel scalability ensures flawless reliability, making it the ideal solution for fortified hyperscale data centers.



OPEX Savings


- AC-AC efficiency up to 97.5%, efficiency optimization at light loads saves energy costs
- Clean mode (voltage independent mode) up to 99.2% efficient guarantees the optimum power condition while maintaining the highest level of efficiency
- Optimizes energy cost with off-peak charging, avoiding peak-time expense
- Elevates grid stability through responsive demand reduction and fast frequency regulation, triggers upon utility requests for eligible bill subsidies

Impeccable Reliability


- Assures smooth power transitions with integrated Synchronized Multiple Bus (SMB), minimizing transformer inrush currents and maintaining balanced power from dual sources
- Parallels up to 8 units for redundancy or expansion, supported by N+1 internal redundancy in power modular configuration
- Maximizes UPS performance and lifespan with self-diagnosis and key component analysis

Ultimate Availability


- Lithium-ion battery ready. Adjustable battery charging voltage adapts to multiple types of batteries
- Seamless power shifts to generator with an advance power walk-in function, pausing during frequency issues for smooth transitions without unnecessary generator sizing expansion
- Grid interactive application. Provides corrective operation for unstable renewal energy sources with an innovative topology design that handles grid and battery power at the same time
- Easy mounting/cabling that supports both top and bottom cable entry and full front access




IT




Telecom




Industrial



Transportation



Financial



Government

Technical Specifications

Model	DPM G2-	300K ⁽¹⁾	600K ⁽¹⁾	900K ⁽¹⁾	1200K	1500K	1800K ⁽¹⁾	2100K ⁽¹⁾
Power Rating		300 kVA 300 kW	600 kVA 600 kW	900 kVA 900 kW	1200 kVA 1200 kW	1500 kVA 1500 kW	1800 kVA 1800 kW	2100 kVA 2100 kW
Parallel Configuration		Up to 8 units						
INPUT								
Nominal Voltage		480 Vac, 3P3W+PE						
Voltage Range		408-552 Vac (100% load)						
Frequency Range		40-70 Hz						
Total Harmonic Distortion (THDi)		< 3% (100% resistive load)						
Power Factor		> 0.99 (100% load)						
Short Circuit Withstand Current		65 kA			100 kA			
OUTPUT								
Nominal Voltage		480 Vac, 3P3W+PE						
Voltage Regulation		±1% (static)						
Frequency		50/60 ± 0.05 Hz						
Total Harmonic Distortion (THDv)		< 1% (linear load)						
Overload Capability		< 110%: continues; 110-125%: 10 mins; 126-150%: 1 min; > 150%: 1 sec						
Current Crest Ratio		3:1						
EFFICIENCY								
Online Mode		Up to 97.5%						
Clean Mode (VI)		Up to 99.2%						
BATTERY								
Battery Type		VRLA/Vented lead-acid/Lithium-ion/Ni-Zinc						
Nominal Voltage		480 Vdc						
Quantity		34-35 ⁽²⁾ , 36-46 pcs (Configurable, 12V VRLA battery)						
Charge Current		* ⁽³⁾	* ⁽³⁾	* ⁽³⁾	500 A	625 A	* ⁽³⁾	* ⁽³⁾
Protection Design		Battery shunt trip x1, Battery temperature detection x4, Battery breaker status dry contact x1						
COMMUNICATION INTERFACE								
Display		10-inch color touchscreen						
Port		Smart slot x2, Modbus (RS-485) port x1, REPO port x1, Input dry contact x6, Output dry contact x6, Synchronized Multiple Bus (SMB) x2, Breaker status detection x4, EMS/Console port x1, Ethernet x1						
Protocols		SNMP, Modbus RTU, Modbus TCP/IP, HTTP(S), SNTP, SMTP, BOOTP, DHCP						
PHYSICAL								
Dimensions (W x D x H)		* ⁽³⁾	* ⁽³⁾		3070 x 990 x 2000 mm	3400 x 990 x 2000 mm	* ⁽³⁾	
Net Weight		* ⁽³⁾	* ⁽³⁾		2408 kg	2779 kg	* ⁽³⁾	
ENVIRONMENT								
Operating Temperature		0 to 40°C						
Humidity		0-95% (non-condensing)						
Altitude		0-2000 m (derating 1%/100m from 1001-2000 m)						
CONFORMANCE								
Safety		UL						
EMC		FCC Class A						
Performance		IEC 62040-3						
Sustainability		RoHS, REACH, Energy Star 2.0						
FEATURES								
Standard		Advance power walk-in for generator, Backfeed protection with contactor, Burn-in test without load bank, Cold start function, Synchronized multiple bus (SMB), Battery shunt trip, Auxiliary power 48 Vdc for shunt trip, Failure prediction						
Optional		Grid interactive, Software integration with Delta Lithium-ion battery BMS, DC battery ground fault detector, Integrated battery switch cabinet, IR scan window						

(1) Upcoming product
(2) 34-35 pcs require service setting and load derating
(3) To be released
(4) Product only available for: Americas, SEA, China, Taiwan, S.Korea, Japan

All specifications are subject to change without prior notice.



UPS Management - Connectivity

G3 SNMP IPv6 Card

Mini SNMP IPv6 Card



Functions and Features

Available Protocols

- SNMPv1, v2c and v3 supported; accepts NMS monitoring as well as actively sends trap packets to target hosts; supports IPv4 and IPv6 TCP/IP protocols
- Modbus TCP/IP
- MQTT (Applicable to mini SNMP IPv6 card)
- Web monitor and set up through network browser with built-in web server
- Remote authentication: SNMP IPv6 card (RADIUS, LDAP); mini SNMP IPv6 card (LDAP, 802.1x)
- Others telnet, SSH, FTP, SFTP, BOOTP, DHCP, SMTP, SNTP, WOL, Syslog
- MIB supports RFC1628 and Delta proprietary UPSv4 and UPSv5 MIB

Management

- Scheduling: performs planned UPS power on & off and battery testing
- Regular power on/ off: set UPS power on/ off time
- Regular battery discharging testing
- Smart power shutdown and send email notice
- Environment probe (optional) for environment temperature and humidity monitoring


Event Log Recording and Export

- Event sequence and UPS parameter data recording

Technical Specifications

Model	G3 SNMP IPv6 Card	Mini SNMP IPv6 Card
DEPLOYMENT		
Network Connection	10/100/1000 M RJ45 Connector	10/100 M RJ45 Connector
Input Power	12 Vdc	
Power Consumption	< 4 W	< 2 W
Operation Temperature	0 to 60°C	
Operation Humidity	0-90%	
PHYSICAL		
Dimensions	130 x 60 mm	87 x 70 x 30 mm
Net Weight	75 g	
CONFORMANCE		
Standard	EN 55032:2015+A11:2020, EN 55035:2017+A11:2020	
Product Certifications	FCC Class B, CE, UL	FCC Class B, CB, UL
Sustainability	RoHS, REACH	

Mini USB Card




Functions and Features

- Communication protocol: SCI: Delta Regular v1.51; USB: Delta HID Protocol v3.4
- Supports HID (Human Interface Device) protocol: the UPS can communicate with Windows XP/2003/2008/2012/Win7/Win8 without monitoring software
- Compatible with Delta UPS standard software UPSentry 2012

Technical Specifications

Model	Mini USB Card
DEPLOYMENT	
Input Power	12 Vdc
Power Consumption	0.5 W
Operation Temperature	0 to 40°C
Operation Humidity	10-80%
PHYSICAL	
Dimensions	68 x 43 mm
Net Weight	30 g

Mini Dry Contact Card



Functions and Features


- UPS status information presented as 3 contact closures
- Configurable input signal as shutdown UPS or battery test
- Programmable output contact monitors status of UPS
- Configurable UPS shutdown delay time
- Protects up to 3 computers
- Unattended graceful shutdown

Technical Specifications

Model	Mini Dry Contact Card
DEPLOYMENT	
Input Power	8-20 Vdc
Power Consumption	0.8 W
Operation Temperature	0 to 40°C
Operation Humidity	10-80%
PHYSICAL	
Dimensions	68 x 43 mm
Net Weight	35 g

UPS Management - Connectivity

Modbus Card

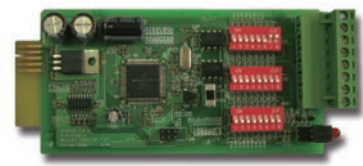

Mini Modbus Card



Converts status and parameter data of your UPS to comply with the standard Modbus protocol

Functions and Features

- Enables UPS-PC communication via Modbus RTU
- Supports Modbus functions: read coils/discrete inputs, holding/input registers, write single coil/register
- Device ID can be set to any number between 0-255
- Adjustable communications interface termination resistance via DIP switch
- Modbus communications format: Supports RTU format
- Baud rate: 2400, 4800, 9600 or 19200
- Data bit: 7 or 8 (Applicable to Modbus card)
- Parity check: none, even or odd

Technical Specifications

Model	Modbus Card	Mini Modbus Card
DEPLOYMENT		
Input Power	8-14 Vdc	10-14 Vdc
Power Consumption	< 1.2 W	< 1.5 W
Operation Temperature	0 to 40°C	0 to 50°C
Operation Humidity	10-80%	5-95% (non-condensing)
COMMUNICATION INTERFACE		
Port	RS-232 x1 ⁽¹⁾ , RS-485 x1, RS-422 x1	RS-232 x1, RS-485 x1
PHYSICAL		
Dimensions	130 x 60 mm	87 x 69 x 30 mm
Net Weight	150 g	58.5 g

(1) RS-232 can simultaneously be used with RS-485 or RS-422.

Relay I/O Card



Mini Relay I/O Card



Functions and Features

- Output**
 - Programmable: 6 output relays can be configured to various UPS events respectively
 - NC/NO: 6 output relays, each of them can be configured to either NC (Normal Close) or NO (Normal Open)
- Input**
 - Programmable: The input signal can be configured to turn off the UPS or to issue a battery test command

Technical Specifications

Model	Relay I/O Card	Mini Relay I/O card
DEPLOYMENT		
Input Power	8-20 Vdc	9-15 Vdc
Power Consumption	< 1.2 W	< 3 W
Operation Temperature	0 to 40°C	0 to 50°C
Operation Humidity	10-80%	
PHYSICAL		
Dimensions	130 x 60 mm	87 x 69 x 30 mm
Net Weight	200 g	70 g

UPS Management - Connectivity


EnviroProbe



EnviroProbe monitors temperature, humidity in a single cabinet or area and transmits signals from environment sensor devices in the data center (e.g.: door sensors, smoke detectors, fire detectors, water-leakage detectors and others) to management via a network.

Functions and Features

- LCD display
- Ambient temperature & humidity monitoring and water-leakage detection
- Digital & analog input/output contacts for monitoring and controlling other devices
- InfraSuite Device Master software for remote monitoring and recording

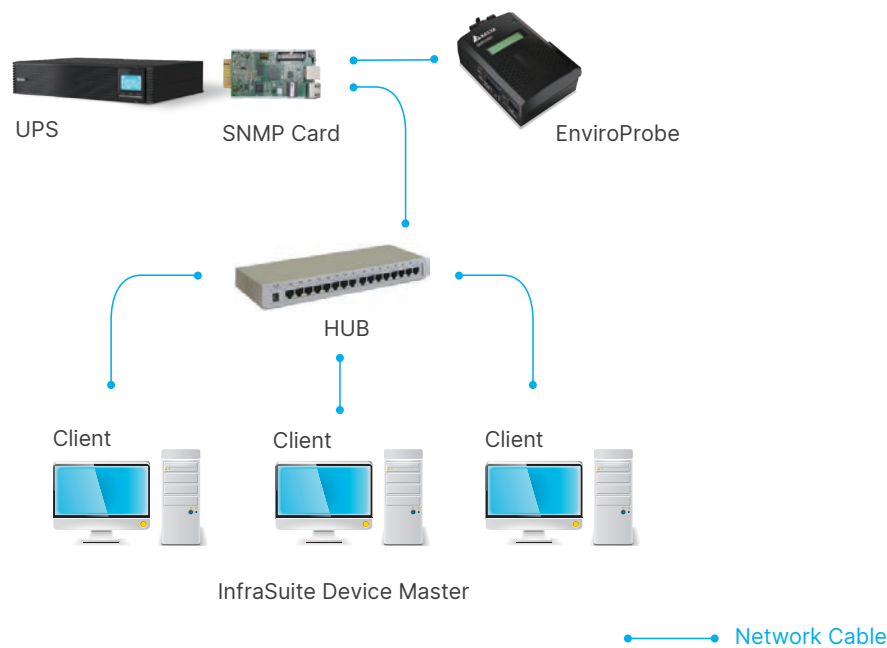

Technical Specifications

Model	EMS1000	EMS1100	EMS1200
DEPLOYMENT			
Input	EMS2000 Delta-BUS or SNMP Card: 12 Vdc (pin 1 & 4) with PDU SNMP card: 5 Vdc (pin 2 & 4)		
Input/ Output Contacts	4 inputs (dry/wet)	4 digital outputs	2 analog inputs, 1 analog output and 1 water-leakage detection
Operation Temperature	0 to 60°C	0 to 45°C	
Storage Temperature	-30 to 80°C	0 to 60°C	
Operation Humidity	0-90% ± 3% (non-condensing)		
PHYSICAL			
Dimensions (W x D x H)	66 x 33 x 99 mm	66 x 33 x 103 mm	
Net Weight	120 g	130 g	
CONFORMANCE			
Standard	EN55022 Class B, EN55024		
Product Certifications	CE, UL, cUL		
Sustainability	RoHS, REACH		

UPS Management - Software

Software	InfraSuite Device Master	UPSentry 2012	ShutdownAgent 2012
Communications Mechanism			
RS-232	●	●	
USB		●	
RS-485	●		
SNMP	●		●
Key Functions			
Shutdown OS		●	●
Centralized management	●		
Remote control	●	●	
Virtual machine shutdown	Hyper-v	●	●
	ESXi		●
Supported Operating Systems			
Windows	●	●	●
Linux		●	●



UPS Management - Software

UPSentry

Functions and Features


- Supports RS-232 and USB communication
- Provides web interface through HTTP and HTTPS
- Provides batch configuration to deploy settings with the snap of a finger
- Supports SNMP Trap v1, v2c, v3
- Supports SNMPv1, v3 server access for monitoring UPSentry 2012 status and configuring shutdown parameters
- Works with ShutdownAgent 2012 to protect a huge number of hosts
- Provides console configuration for basic system parameters setup
- Supports Windows and Linux 32/64 bits software programs

Supported Operating Systems

- Windows 7, 8, 10, 11
- Windows Server 2012, 2016, 2019
- Windows Hyper-V Server Core 2016/2019
- Redhat Linux Enterprise 8.3
- Oracle Linux 7.1
- Linux OpenSUSE 11.4
- Linux ubuntu 10.04, 12.04.5, 16.04, 20.04
- Citrix XenServer 6.0.0
- Linux KVM

Event Tracking

- Supports 10,000 event log entries
- Displays history values by a single date, month and year or a defined period of time
- Exports data in csv. file format
- Clears the history data and event logs on the web interface

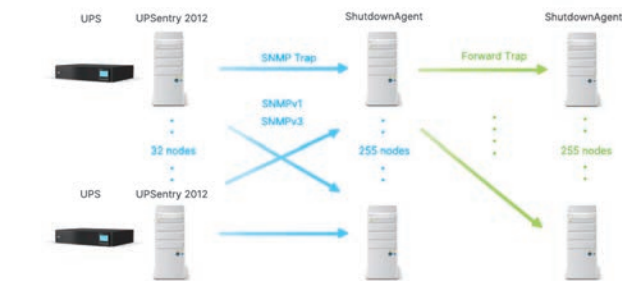

Scheduling

- Supports scheduling shutdown, restart and battery test
- System power on/off
- 10 seconds test and deep discharge test

Shutdown Protection

- Input power fail
- Battery low
- Overload
- Bypass
- Schedule shutdown


Web Interface

- Monitors UPS status through web interface
- System Summary: UPS identification, shutdown type, scheduling information and last five events log
- Battery: battery status, battery measurement, battery cabinet and replacement date
- In/Out/Bypass: Information on input measurement, bypass measurement and output measurement
- Identification: Information on identification and UPS rating
- Status Indication: Information on immediate UPS status indication
- Power Module: Information on power module bypass and power module ID1/2/3/4
- Shutdown Agent: Collect all of the ShutdownAgent 2012 which you have assigned to work with UPSentry 2012 to protect a group of servers
- Displays event log and history values

Shutdown Agent

Functions and Features

- Supports SNMPv1, v2c, v3 trap
- Provides web interface through HTTP and HTTPS
- Provides batch configuration to deploy settings with the snap of a finger
- Forwards SNMP trap to extend protecting more than 255 servers
- Supports up to 32 input trap sources for redundant (logical OR) and parallel (logical AND) application
- Provides console configuration for basic system parameters setup
- Supports Windows and Linux 32/64 bits setup programs

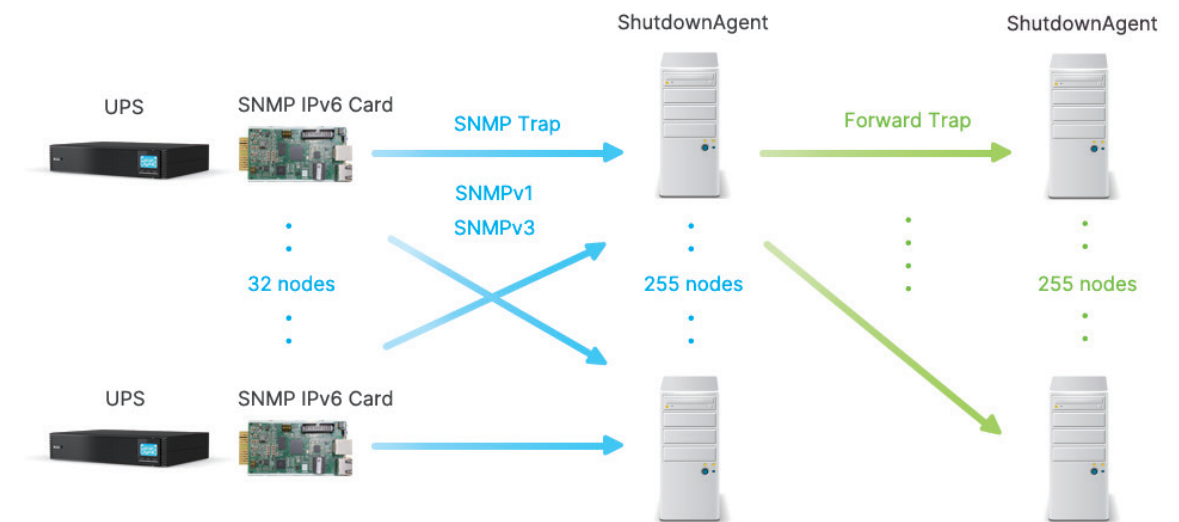

Supported Operating Systems

- Windows 7, 8, 10, 11
- Windows Server 2008, 2012, 2016, 2019, 2022
- Windows Hyper-V Server Core 2016/2019
- Redhat Linux Enterprise 8.3
- Oracle Linux 7.1
- Linux OpenSUSE 11.4
- Linux ubuntu 10.04, 12.04.5, 16.04, 20.04
- Linux Fedora 3.1.9
- VMWare ESXi 4.1, 5, 5.1, 5.5, 6, 7, 7.5, 8 (with essential license after version 5)
- Citrix XenServer 6.0.0
- Linux KVM
- IBM AIX 7.1

UPS Management - Software

Delta InfraSuite Device Master

InfraSuite Device Master provides a rich set of capabilities that simplify and automate critical device monitoring. It allows users to observe the status of all devices, query event logs or history data, and assists users in taking appropriate action. With cost effective deployment, this software solution is scalable to match your business growth.

Free to Download

InfraSuite Device Master is free to download with 5 nodes by default for monitoring your devices. Various infrastructure facilities such as power and cooling in a data center can be monitored.

Real-Time Monitoring

Users can gather the latest status of critical facilities in a data center through the system screens of InfraSuite Device Master. InfraSuite Device Master also lets you view all of a site's device information, query history and events at the same time, even for multiple sites in different countries.

Easy to Deploy

The download file is ready on the Delta Software website. InfraSuite Device Master is easy to install on your server or PC, with software designed for quick installation and implementation.

Migration to InfraSuite Manager (DCIM)

If you are not only looking for device monitoring but also a complete DCIM solution, InfraSuite Device Master is the quickest way of migrating to InfraSuite Manager, which is Delta's full feature DCIM software solution.

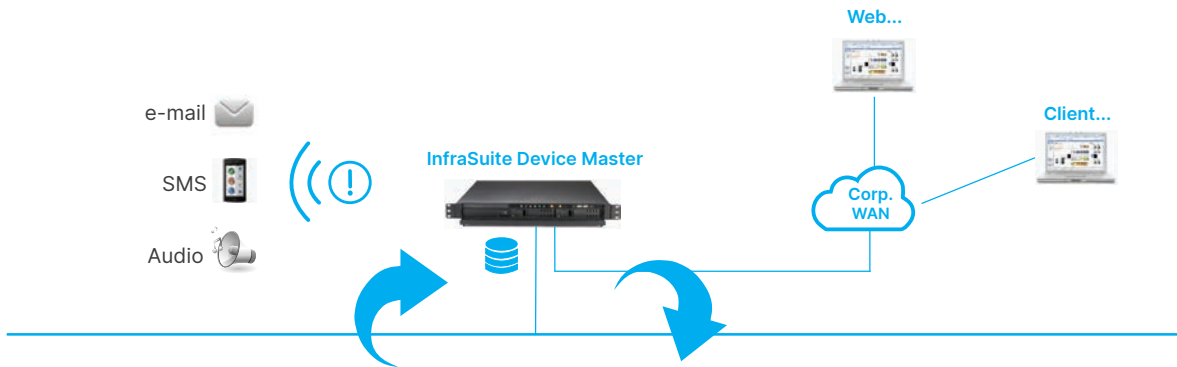


FIGURE 1. Delta InfraSuite Device Master Monitoring Application



To download InfraSuite Device Master, go to:
<https://www.deltaww.com/en-us/products/management-system/data-center-infrasuite-device-master>

Product Features

Navigational Graphics

Navigational graphics of the InfraSuite Device Master are customizable. Users can design a floor layout using the provided components.

Multiple Protocol Support

InfraSuite Device Master supports multiple device protocols, such as Modbus, SNMP and OPC.

Proactive Notification

Proactive notifications provide automated, personalized email, short messages, and audio to users.

User Account Management

Users can be classified into groups based on privilege levels. The job scope of each privilege level is defined by administrators. The jobs include the level of visible access to layout plans, device control and system operation.

Event Management

InfraSuite Device Master has categorized event levels with 16 levels to help users take appropriate action accordingly. In addition, events can be queried by time, type, level and devices. InfraSuite Device Master records the system, operator and device events in its database where the user can review the events' status.

Data Storage and Backup

InfraSuite Device Master stores all history events and data into its database. Users may use this data for analysis. In addition, the database can be backed up automatically according to user preference.

System Requirements

	InfraSuite Device Master: Server	InfraSuite Device Master: Windows Application UI	InfraSuite Device Master: Web Monitor UI
Hardware	CPU: > 2 GHz Memory: ≥ 4 G Free HD Space: ≥ 50 G	CPU: > 2 GHz Memory: ≥ 4 G	CPU: > 2 GHz Memory: ≥ 4 G
Software	Supported OS: Windows 10, 11 Windows Server 2016, 2019, 2022	Supported OS: Windows 10, 11 Windows Server 2016, 2019, 2022	Recommended Browser: Google Chrome, Mozilla Firefox and Microsoft Edge.

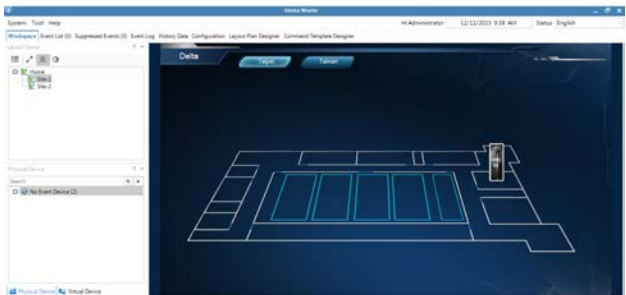


FIGURE 2. Navigational Graphics

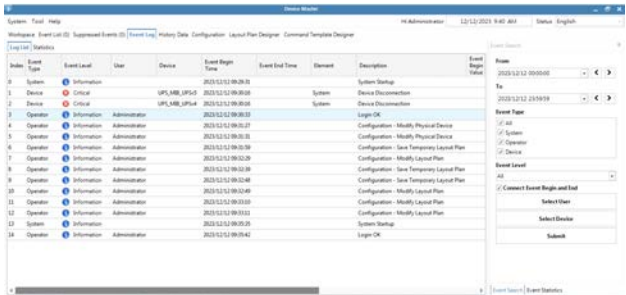


FIGURE 3. Event Log List

Delta: Your Complete Data Center Solutions Provider

In the data center environment, reliable power distribution and efficient cooling are equally vital alongside high performance UPSs. Delta ensures excellence on every front, delivering uninterrupted power flow for optimal performance.

Power Management



Power Distribution Unit (PDU)

- Support for customization
- Robust resilience: adopts compartmentalized electrical components, redundant aux-power, K-factor isolation transformer
- Enhanced efficiency: uplevels natural convection cooling and DOE-compliant copper transformer
- Easy management: offers real-time & optional billing grade metering system



Rack Power Distribution Unit (rPDU)

- Basic, metered and switched types available (Support for customization)
- Space saving: supports Zero-U, vertical/horizontal, rear and side installation
- Effortless handling: uses network module for remote management

Busway

BL Series



- Rating: 400-6400 A. IP 68 certified, designed for outdoor use
- Crafted with vacuum-cast epoxy, ensures safety and reliability with copper or aluminum conductors for efficient power transmission
- IEC 61439, UL 857 certified

BR Series



- Rating: 250-2000 A. IP20 (IP55 optional) for white space use
- Uses epoxy cast resin for safety and reliability, with copper conductors exceeding 99.9% purity
- Hot-swappable plug-in units and successive plug-in slot
- IEC 61439, UL 857 certified



Static Transfer Switch (STS)

- Rating 200/ 800/ 1800 A (Support for customization)
- Excellent reliability: provides redundant aux-power, control board and fan
- Easy maintenance: modular design offers full front access, top/bottom cable entry



Rack Static Transfer Switch (rSTS)

- 1-phase and 3-phase rPDUs with CE or UL certification
- Patented SCR with parallel relay enhances reliability without sacrificing efficiency



Cooling



Liquid Cooling

- Liquid-to-Liquid CDU
- Liquid-to-Air CDU
- Single-phase immersion cooling (Hydrocarbon)
- Two-phase immersion cooling



Air Cooling

- Rear door heat exchanger (RDHx)
- Room cooling: with both CW⁽¹⁾ and DX⁽²⁾ system types
- In-row cooling: with both CW and DX system types
- Air distribution unit

(1) CW: Chilled water system (2) DX: Direct expansion system



Rack & Accessories



Modular Rack

- Tool-less setup, smooth cable management with 70% perforation for heat dissipation
- Compliant with EIA-310-D rack standards
- Versatile accessories for organized data centers with customized service



Management System



Data Center Infrastructure Management (DCIM)

- Consolidates all aspects of facility and IT equipment management into one platform
- Integrates modules for data center operations, including asset and server management, PUE energy monitoring, and graphical analysis for energy optimization

About Delta Group

Leading expert in power management and thermal management solutions




Delta, founded in 1971, is a global provider of power and thermal management solutions. Its mission statement, "To provide innovative, clean and energy-efficient solutions for a better tomorrow," focuses on addressing key environmental issues such as global climate change. As an energy-saving solutions provider with core competencies in power electronics and automation, Delta's business categories include Power Electronics, Automation, and Infrastructure.


Delta offers some of the most energy-efficient power products in the industry, including switching power supplies with efficiency over 90%, telecom power with up to 98%, and PV inverters with up to 99.2% efficiency. We have also developed the world's first server power supply certified as 80 Plus Titanium.



Global Footprint

World's No. 1 in Switching Power Supplies, DC Brushless Fans and Telecom Power Systems.
157 sales offices and **51** manufacturing facilities worldwide.
Over **8%** of annual sales revenues invested in R&D with over **10,000** engineers in **73** R&D centers worldwide.
Awarded over **12,000** patents and received internationally recognized design awards including iF, Reddot, and the Taiwan Excellence awards.

	Asia-Pacific	Americas	EMEA	Total
 Sales Offices	99	29	38	166
 Plant Sites	40	6	6	52
 R&D Centers	48	11	14	73

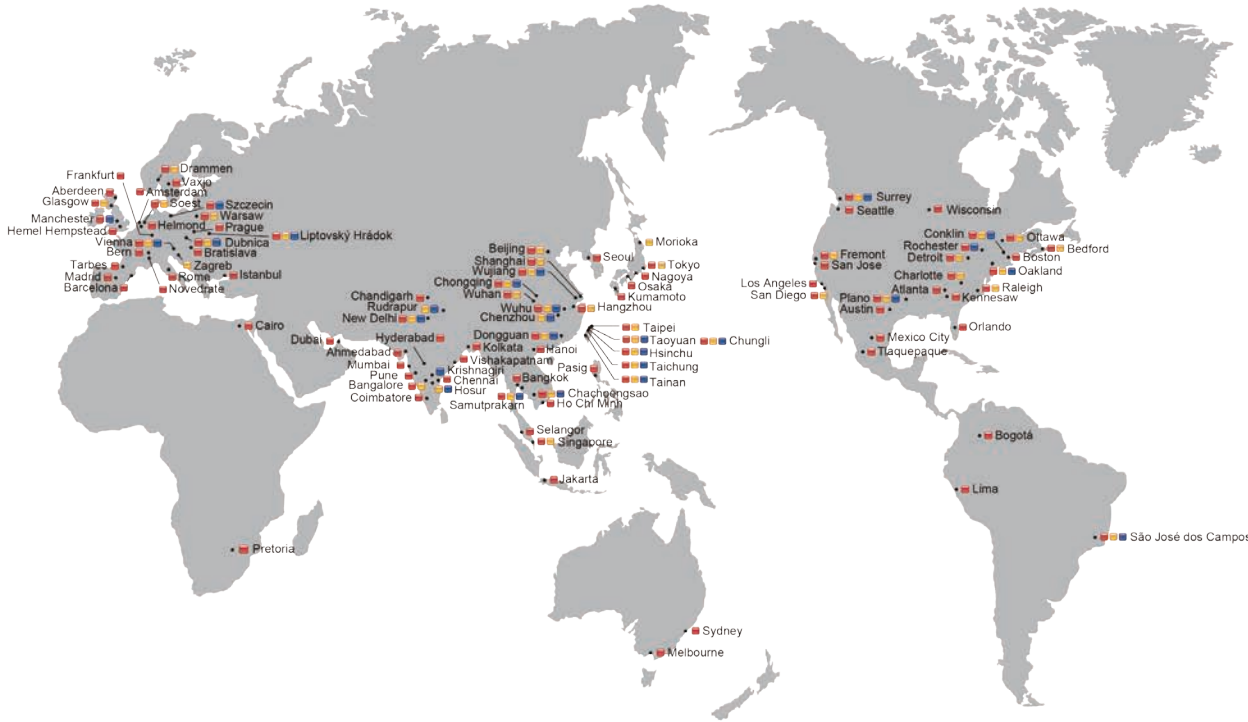

Europe

The Netherlands (EMEA Headquarters)

Delta Electronics (Netherlands) BV
T +31 (0) 20 800 39 00
E ups.netherlands@deltaww.com

Czech Republic

Delta Energy Systems
T +420 272 019 330
E ups.czech.republic@deltaww.com

Finland

Delta Solutions (Finland) Oy
T +358 9 84966 0
E ups.finland@deltaww.com

France

Delta Electronics (France) SAS
T +33 5623 40930
E ups.france@deltaww.com

Germany

Delta Electronics (Germany) GmbH
T +49 69 42002 0
E ups.germany@deltaww.com

Poland

Delta Electronics (Poland) Sp. z o.o.
T +48 22 335 26 00
E ups.poland@deltaww.com

Slovak Republic

Delta Electronics (Slovakia) s.r.o.
T +421 2 6541 1258
E ups.slovakia@deltaww.com

Switzerland

Delta Electronics (Switzerland) AG
T +41 31 998 53 11
E ups.switzerland@deltaww.com

Spain

Delta Electronics Solutions (Spain) SLU.
T +34 91223 7420
E ups.spain@deltaww.com

Turkey

Delta Greentech Electronic San. Ltd.
T +90 216 499 9910
E ups.turkey@deltaww.com

United Kingdom

Delta Electronics (UK) Ltd.
T +44 1442 219355
E ups.united.kingdom@deltaww.com

Middle-East & Africa

South Africa

Delta Energy Systems MEA (South Africa)
T +27 12 663 2714
E ups.south.africa@deltaww.com

United Arab Emirates

Delta Electronics MEA DMCC
T +971 44 440 4966
E ups.middle.east@deltaww.com

Americas

The United States

Delta Electronics (Americas) Ltd.
T +1 510 668 5100
E ups.na@deltaww.com

Brazil

Delta Electronics Brasil Ltda.
T +55 12 3932 2300
E ups.brazil@deltaww.com

Colombia

Delta Electronics Colombia SAS
T +57 317 4052794
E ups.colombia@deltaww.com

Peru

Delta Electronics (Peru) Inc. S.R.L.
T +51 962 834 287
E ups.peru@deltaww.com

Asia Pacific

Australia

Delta Electronics (Australia) Pty Ltd.
T +61 2 9479 4200 / +61 3 9543 3720
E ups.australia@deltaww.com

China

Delta GreenTech (China) Co., Ltd.
T +86 21 5863 5678 / +86 21 5863 9595
E ups.china@deltaww.com

India

Delta Electronics India Pvt Ltd.
T +91 124 4874 900
E ups.india@deltaww.com

Indonesia

Delta Electronics International (S) Pte Ltd.
T +65 9667 4687
E ups.indonesia@deltaww.com

Japan

Delta Electronics (Japan), Inc.
T +81 3 5733 1111
E jpstps@deltaww.com

South Korea

Delta Electronics (Korea), Inc.
T +82 2 515 5303
E ups.south.korea@deltaww.com

Malaysia

E ups.malaysia@deltaww.com

Philippines

Eltek Power Inc./ Delta
E ups.philippines@deltaww.com

Singapore

Delta Electronics Int'l (Singapore)
T +65 6747 5155
E ups.singapore@deltaww.com

Taiwan

Delta Electronics Inc.
T +886 6 505 6565
E ups.taiwan@deltaww.com

Thailand

Delta Electronics (Thailand) Public Co., Ltd.
T +662 709 2800
E ups.thailand@deltaww.com

Vietnam

Delta Electronics (Vietnam) Ltd.
T +84 (0) 966 53 22 66
E ups.vietnam@deltaww.com



Delta Group



Delta Power Solutions



Delta ICT LinkedIn



Delta ICT YouTube

